
# 








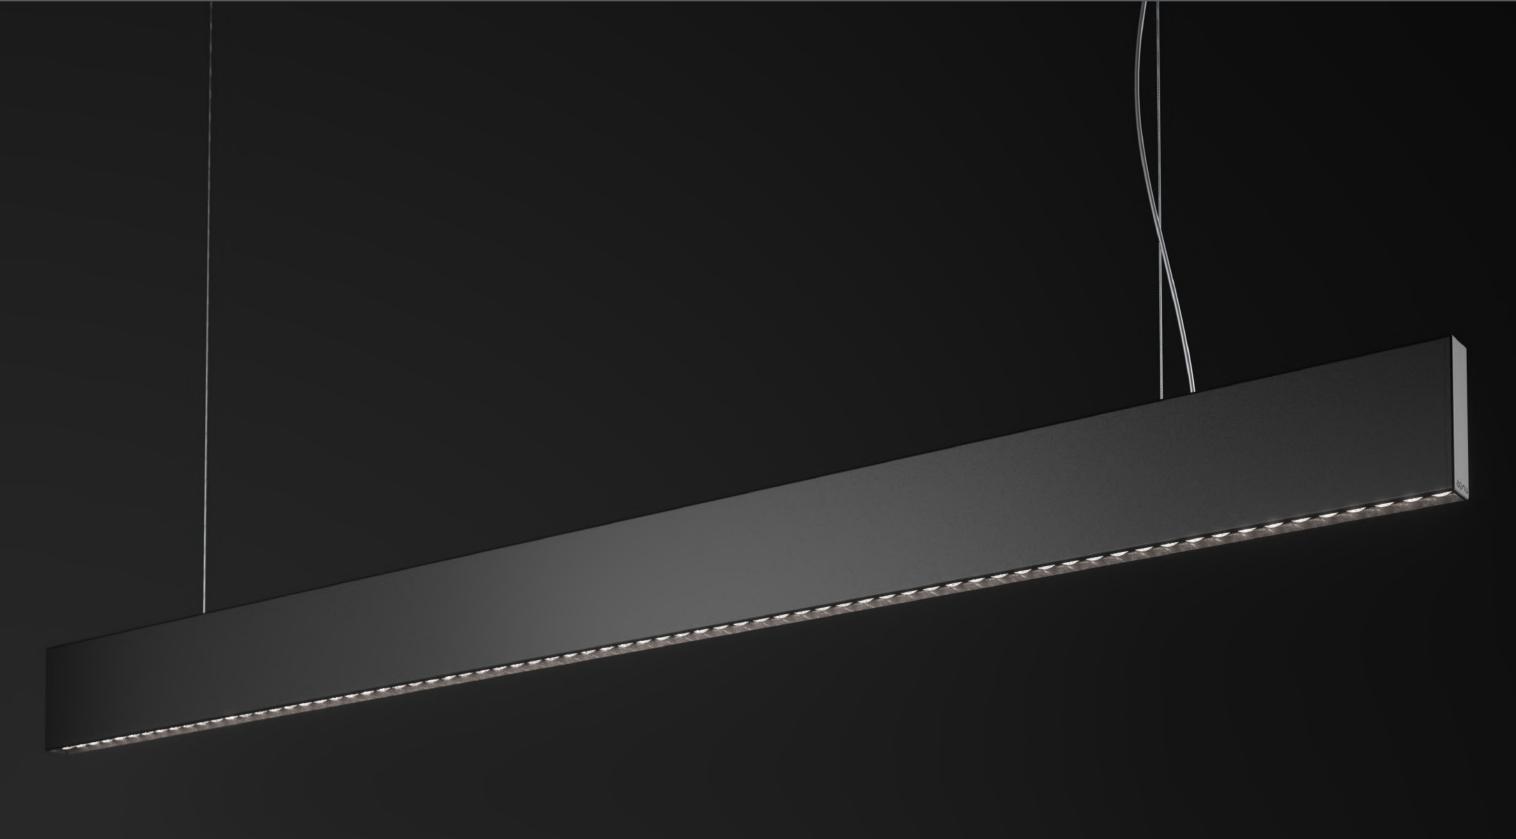



# Superlinea, supersexy!


Superlinea is our latest product innovation capable of perfectly combining aesthetics and functionality, offering high performance with minimal glare, thus guaranteeing a dynamic and comfortable environment.

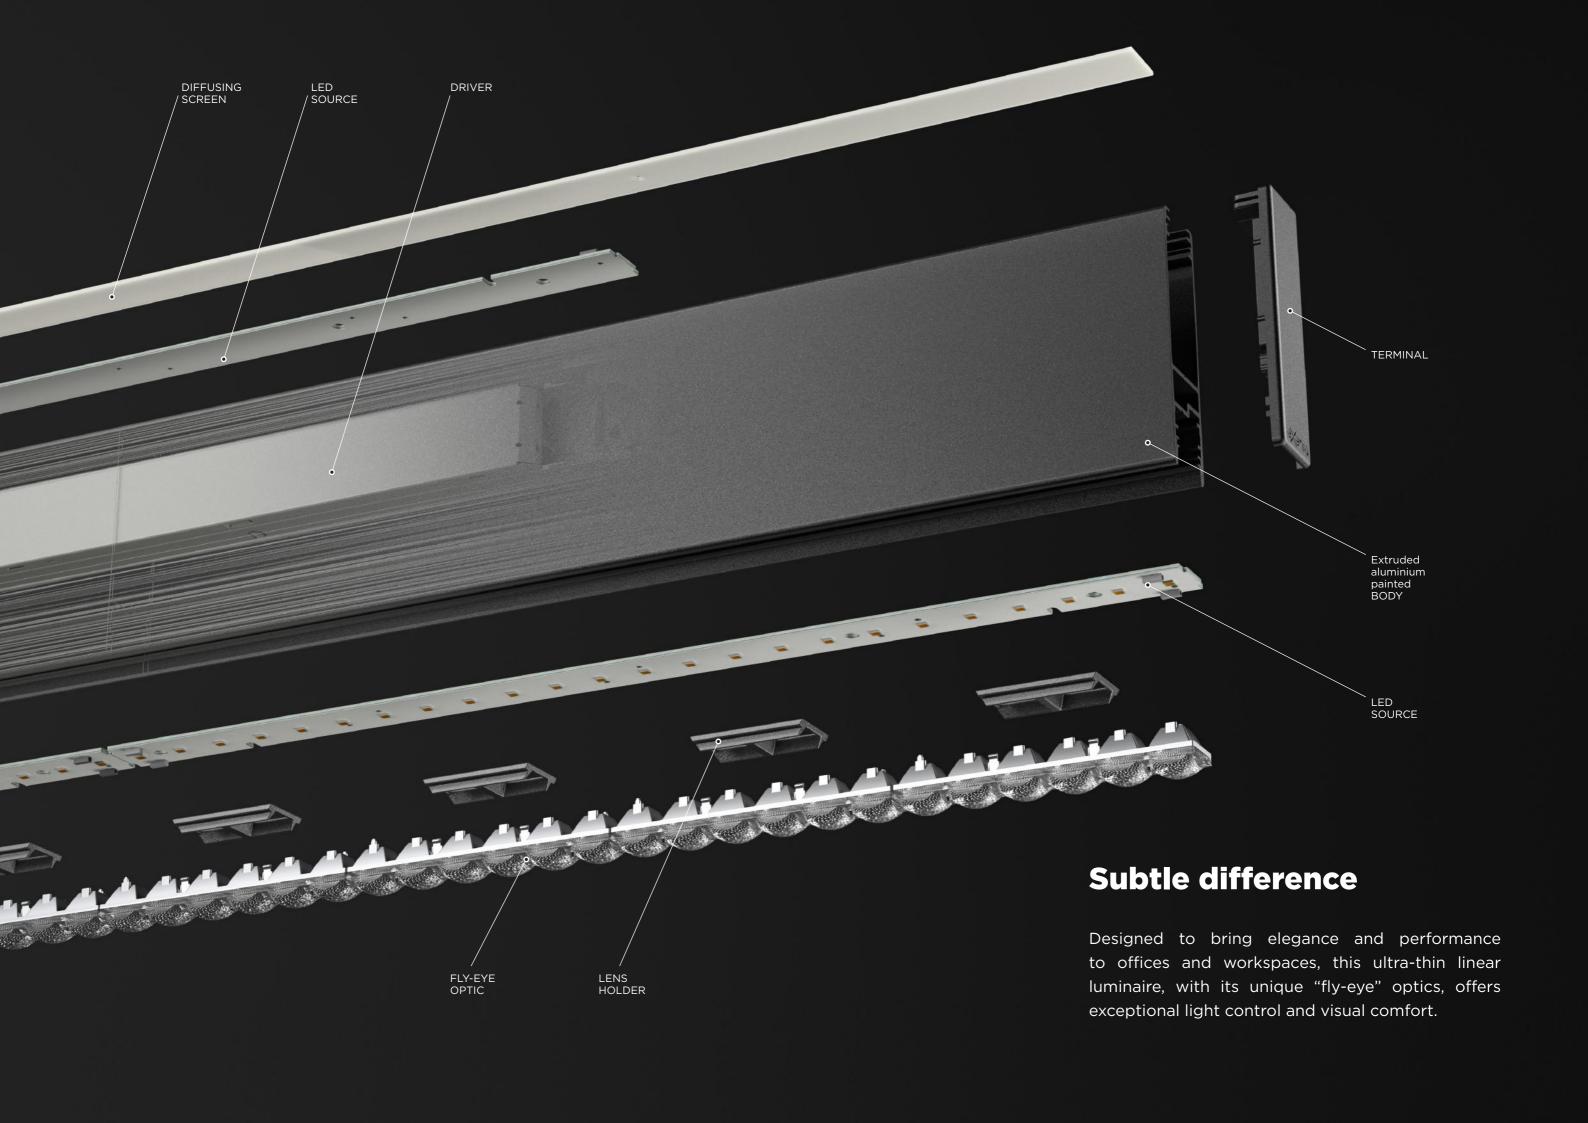






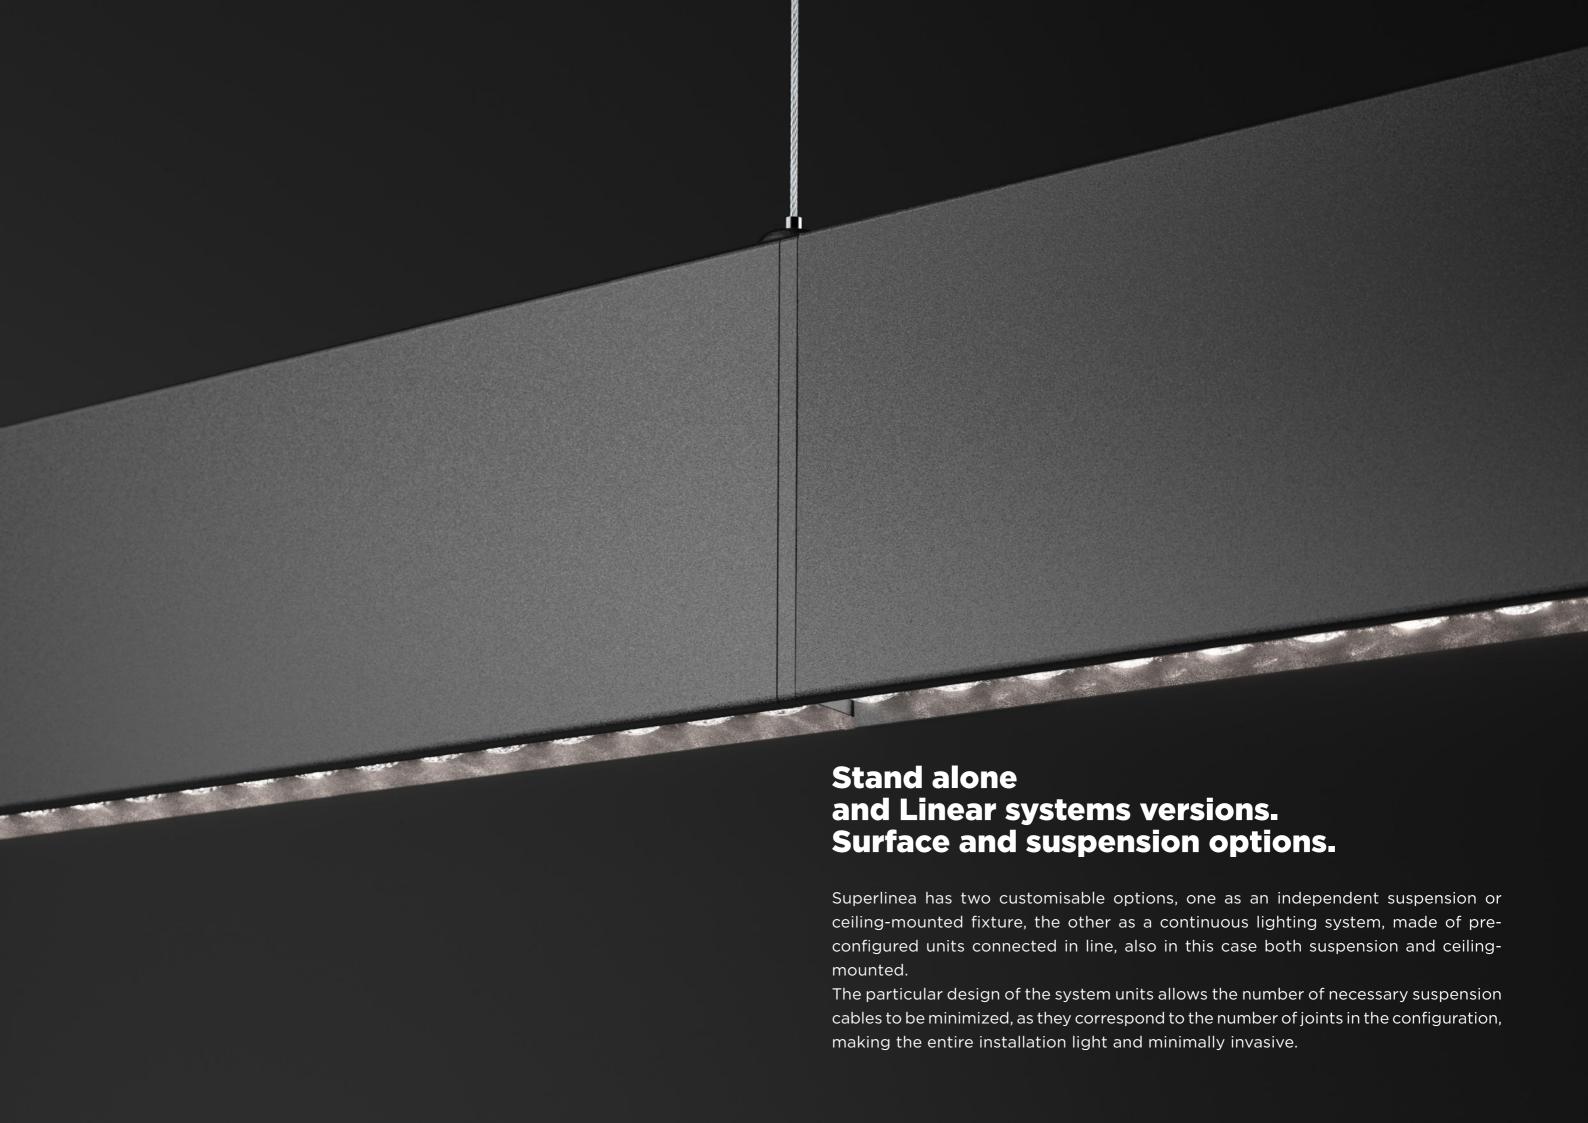

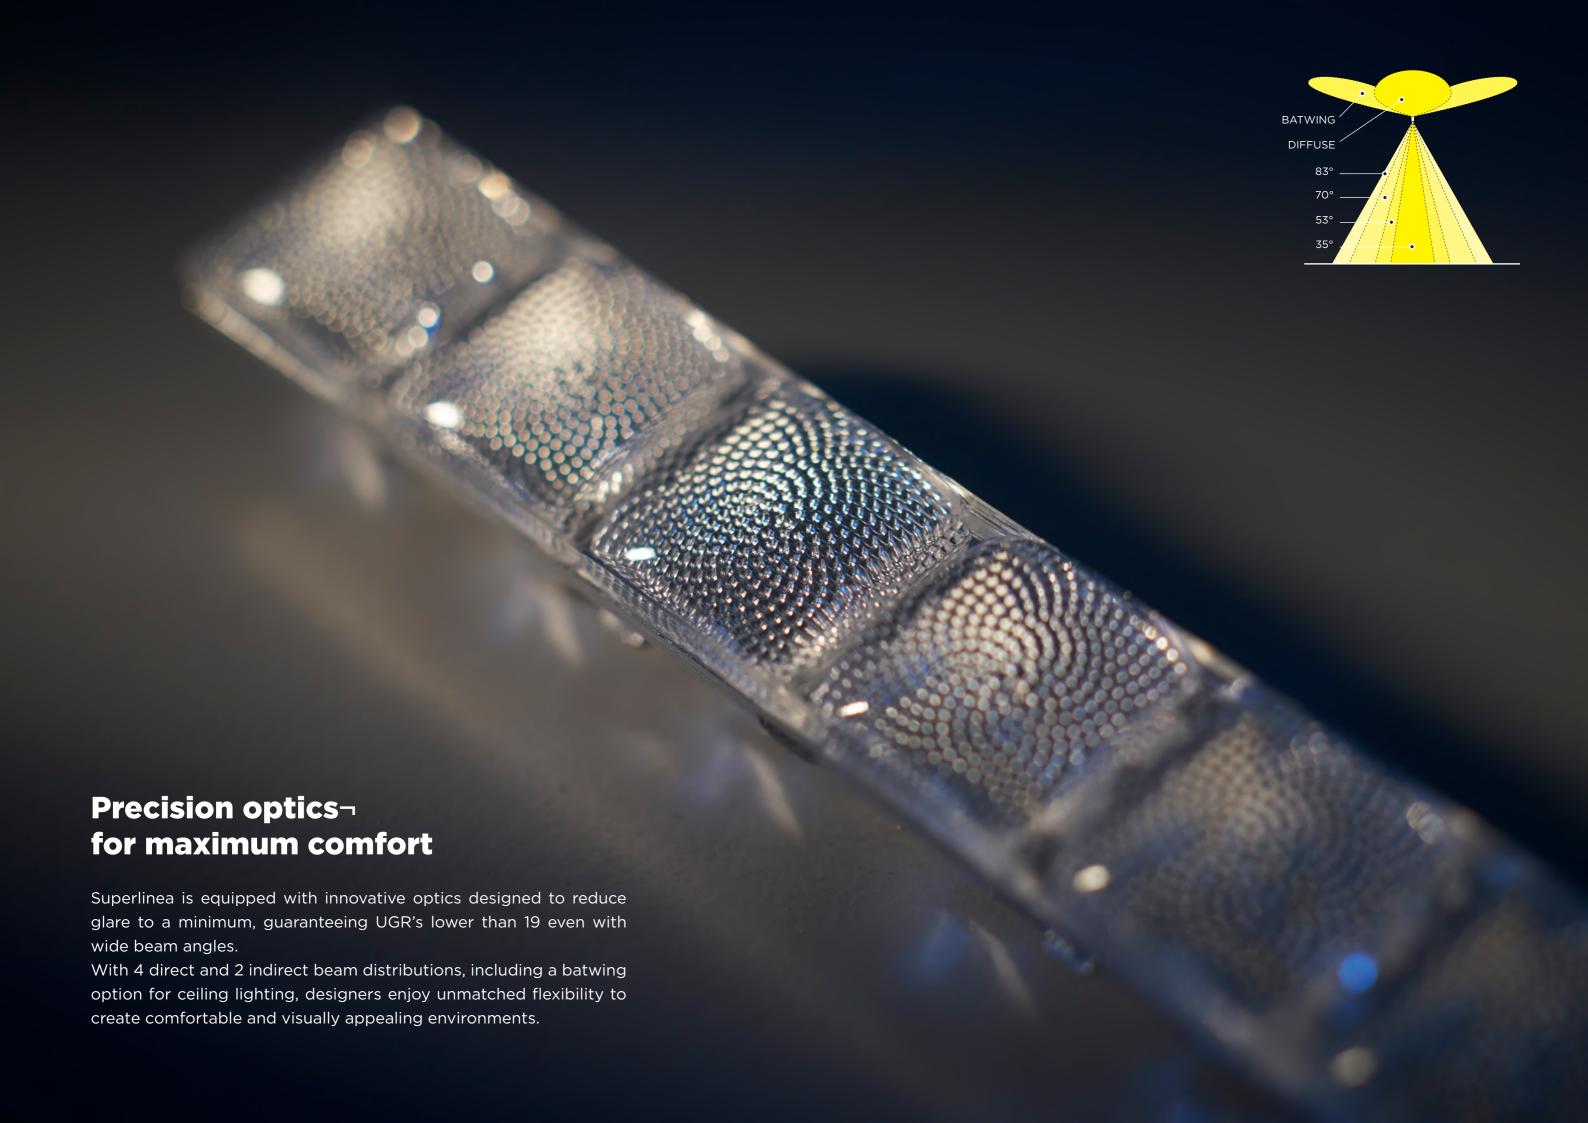

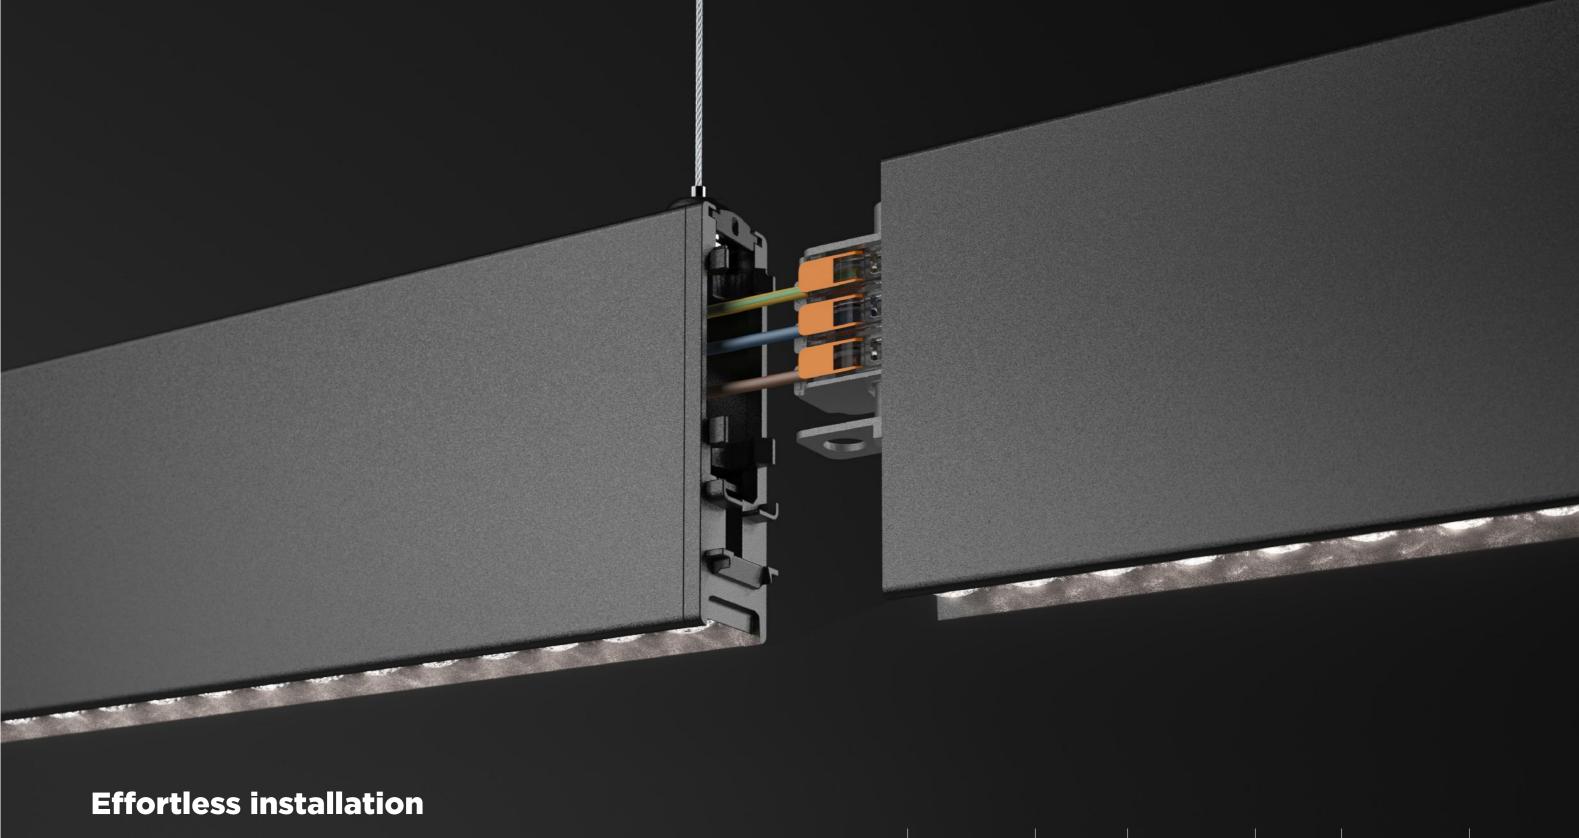


Superlinea simplifies the setup and installation process with built-in drivers and tool-free quick connection capabilities. Each fixture integrates seamlessly into a cohesive system without the need for additional components.

The unique design of the system units allows the number of necessary suspension cables to be minimised, as they will correspond to the number of joints in the configuration, making the entire installation uncomplicated and minimally invasive. This simplified approach not only reduces installation time but also minimizes errors, ensuring a cost-effective and hassle-free setup for both designers and installers.




### STAND ALONE






# **Finishes**

Superlinea in the system configuration it is offered in three options, txt white, txt black and grey aluminium txt, while in the 'standalone' suspension and ceiling-mounted configurations, three new colors are added to the previous ones, three material and textured finishes, iron grey, olive green, light bronze metallic.

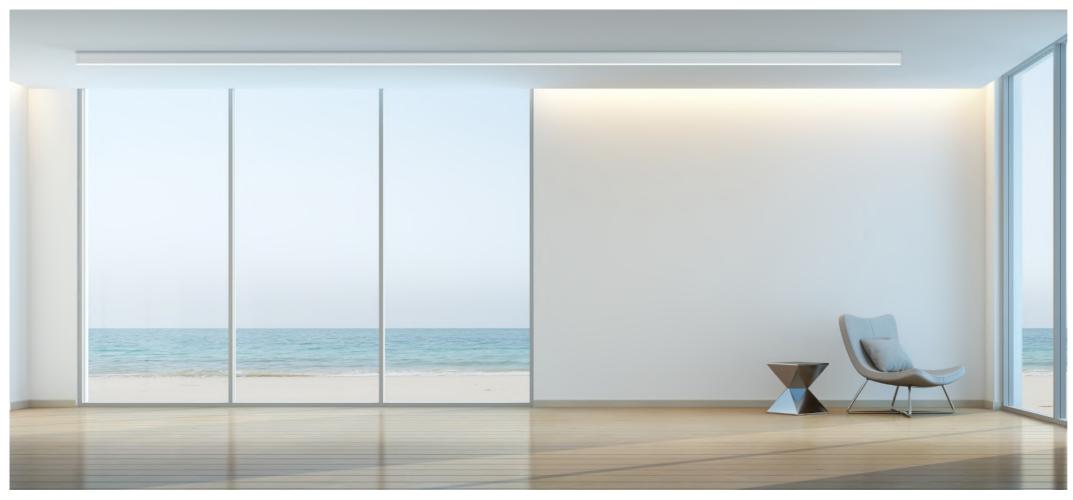



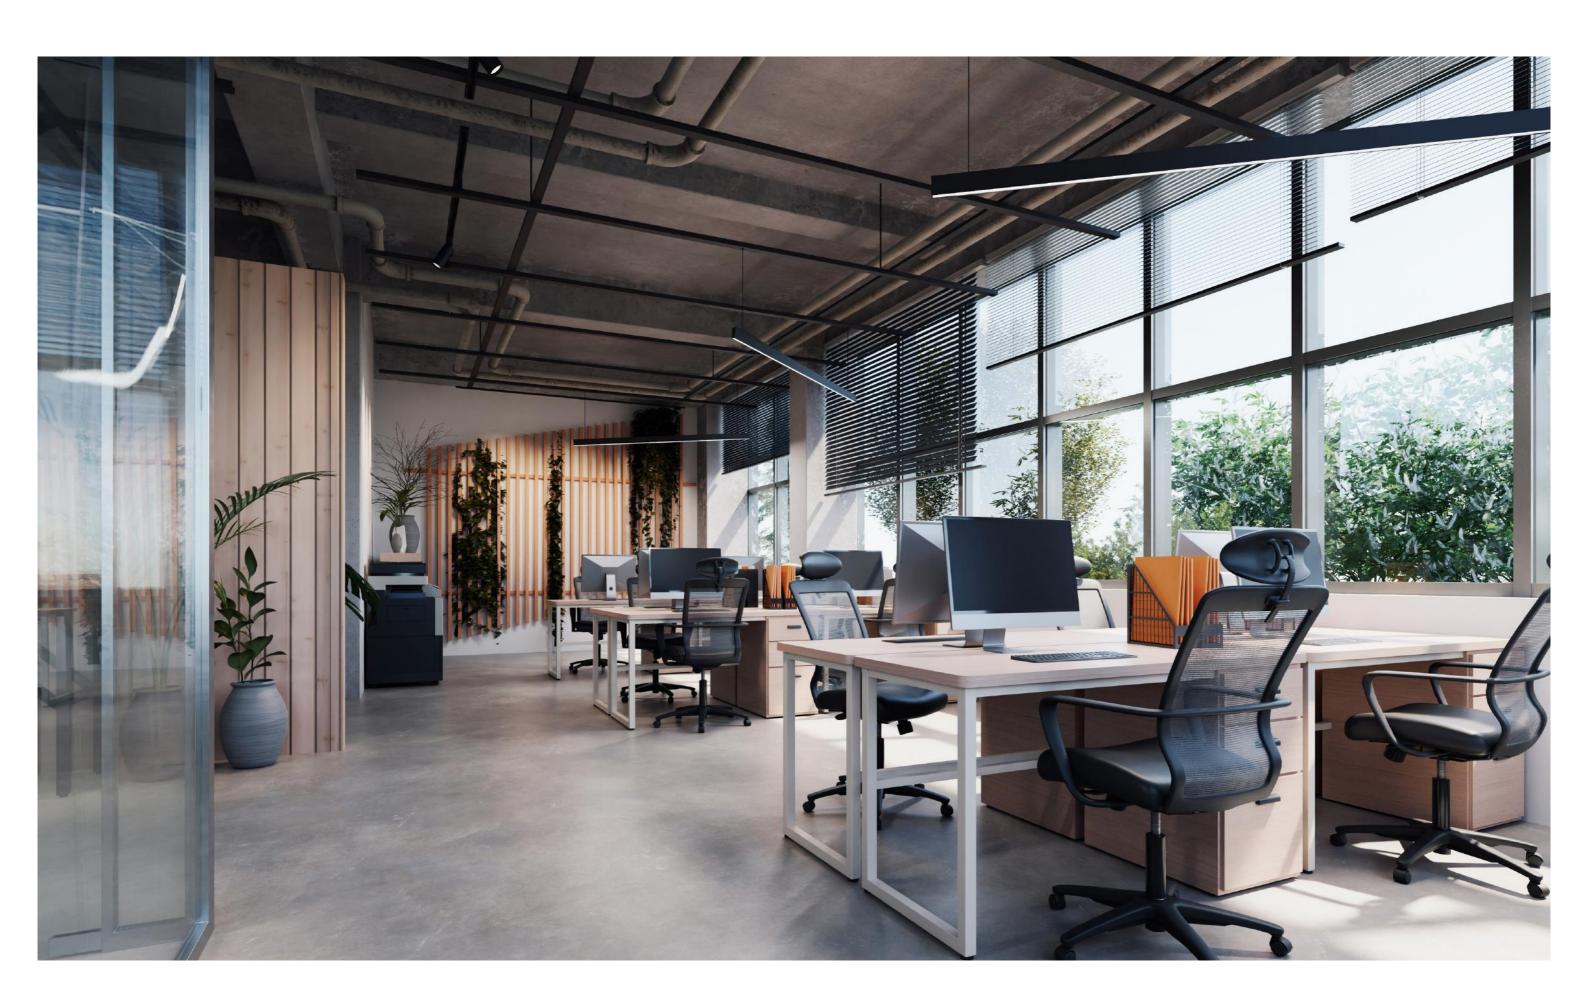










# **SUMMARY SHEET**

### **Versions**

### Installation





SYSTEM





CEILING

• ON/OFF control

Controls

**Outputs** 

(Depending on optics and dimensions)

500 lm | 700 lm | 1000 lm 1300 lm | 2000 lm | 3500 lm 4000 lm | 5000 lm | 5500 lm 6500 lm | 7000 lm | 7500 lm

- DALI
- PUSH
- CASAMBI

### **Colour rendering**

- CRI 92
- CRI 98


### **McAdams**

• 3 STEP

### **UGR**

• UGR<19

### **Colour temperature**



### Certifications

- IP 20
- IP 40




# **Dimension**


STAND

ALONE


### STAND ALONE



### LINEAR SYSTEM




### **Emission**



### **DOWN optics**

### **UP optics**



### **Finishes**



TXT

WHITE

















TXT **BLACK** 

LIGHT BRONZE

IRON GREY

OLIVE GREEN



SYSTEMS







# **Power of Miniaturisation**

The 48v Exenia system is fundamentally different in two aspects: performance and composition.

In this collection two exclusive innovations unique to the market converge: the specialisation and power of the Revo optics and the extreme compositional freedom given by the various accessories, among others, specific patented joints which allow for the overlap of the tracks and the consequent simplified and free composition of the systems.



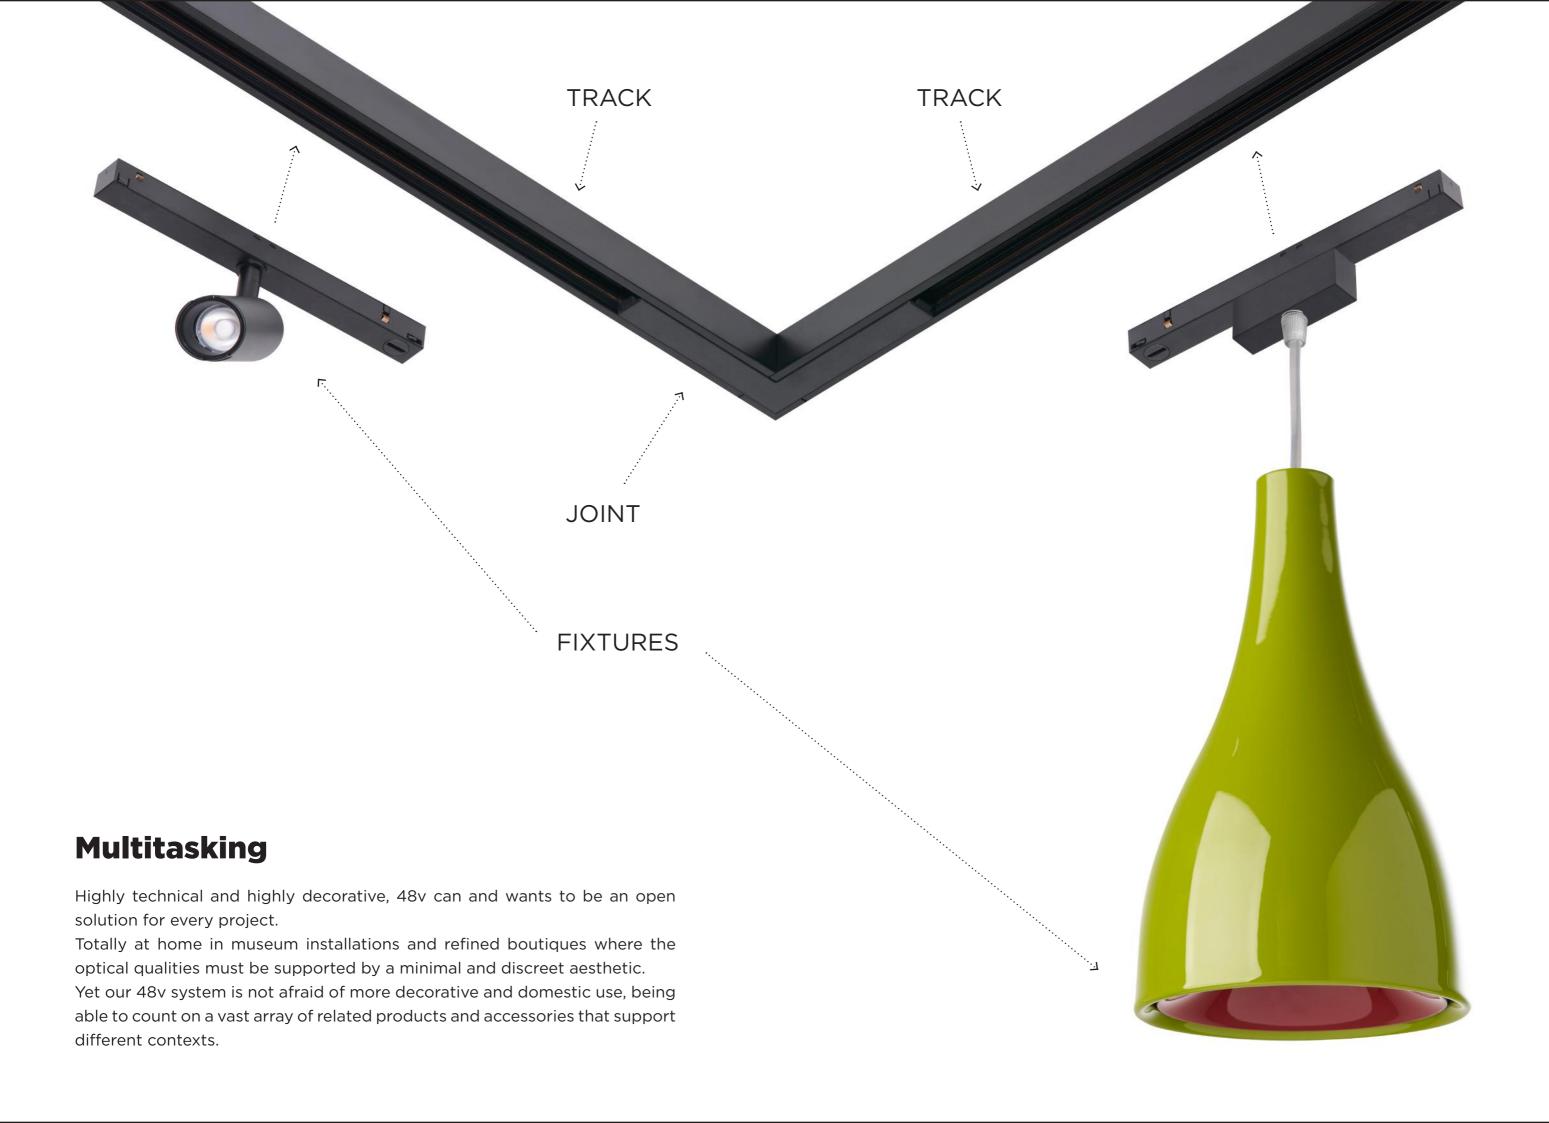

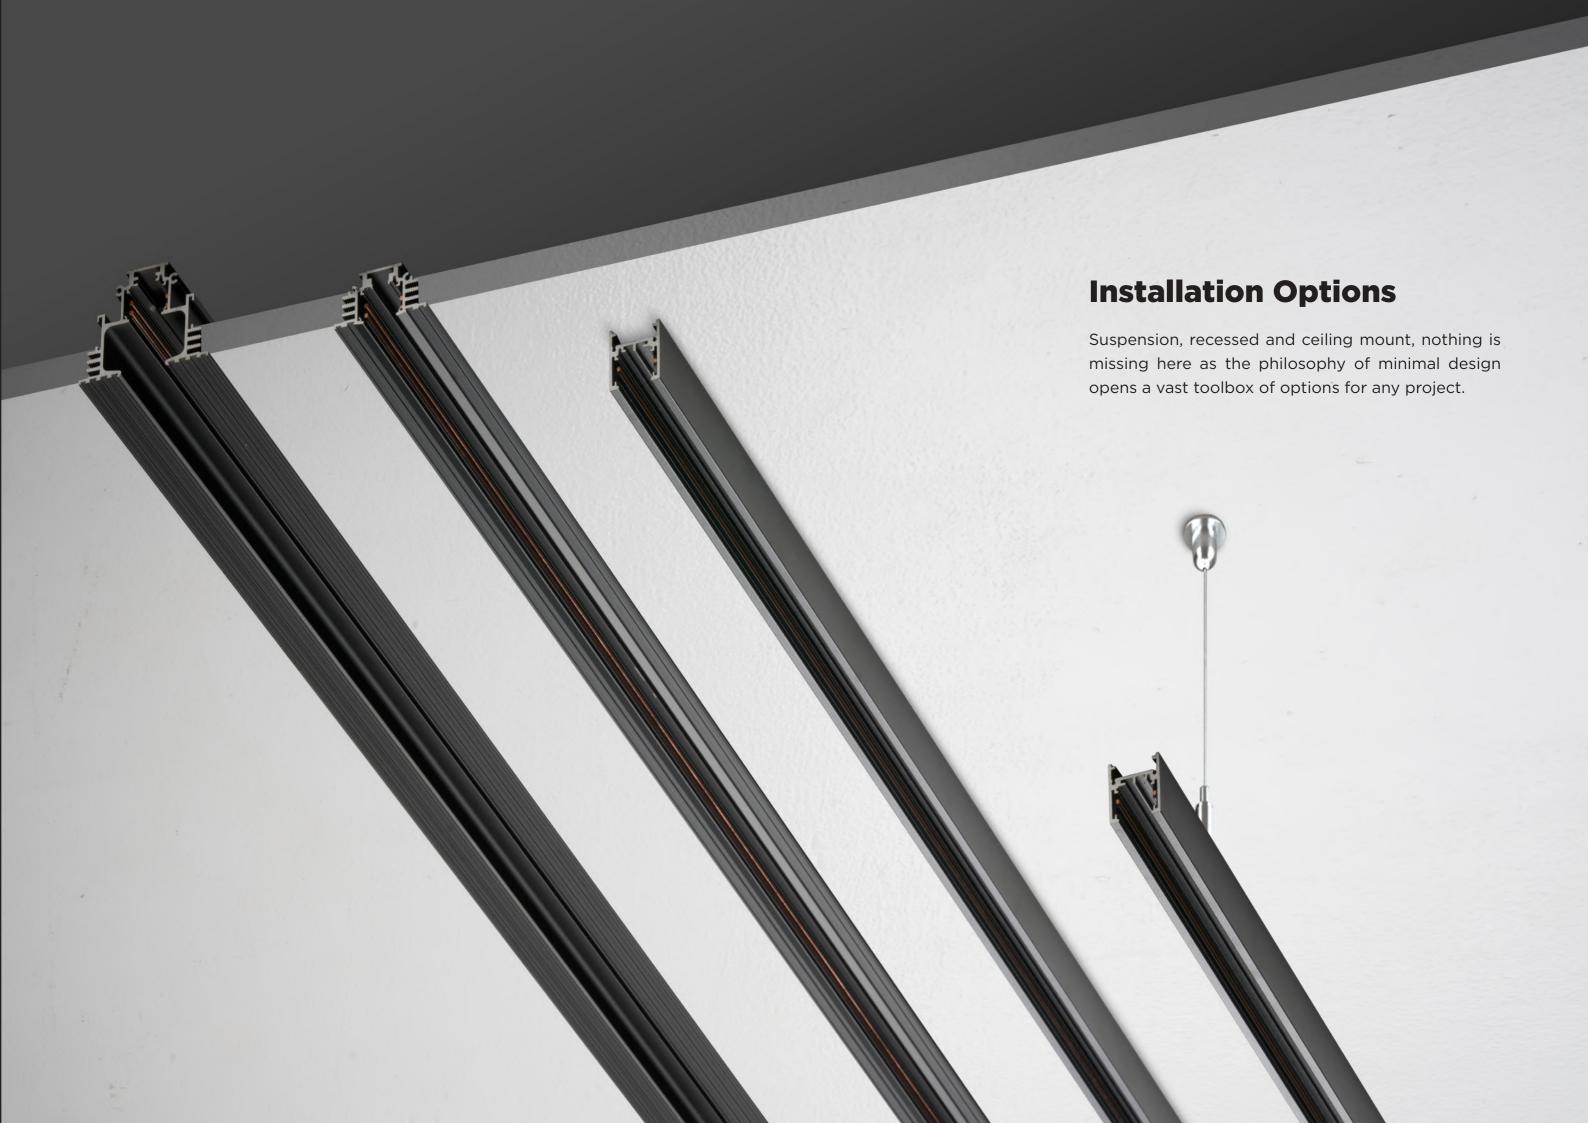





# **Lighting Options**

Projectors with Revo optics in all sizes, diffused linear track light, suspensions, opal glass diffusers, bright colours or opaque and material shades are just some aspects of the creative puzzle that the system offers.









# SYSTEM 48

### 48 REVO PROJECTORS



### **48 PROJECTORS**



### 48 SUSPENSION



Zik 48

## 48 OPALS



# SYSTEM 48 Micro





spot 48 REVO

### 48 LINEAR




### **48 SUSPENSION**

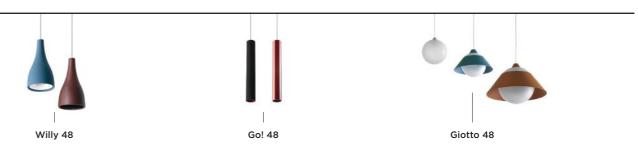

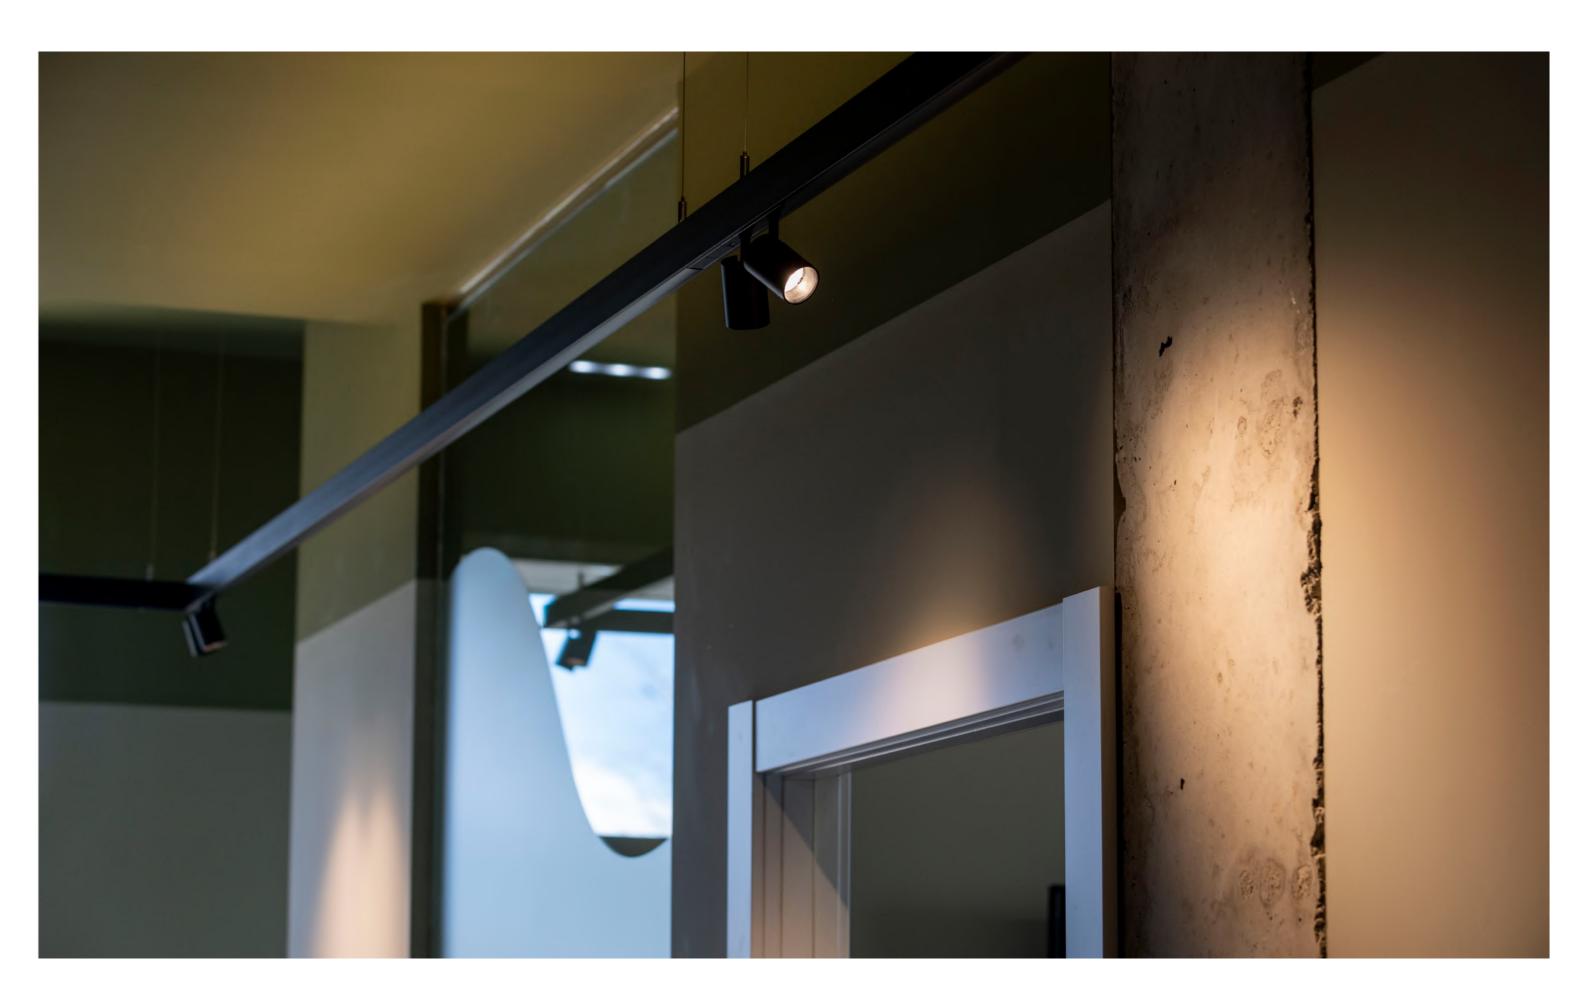






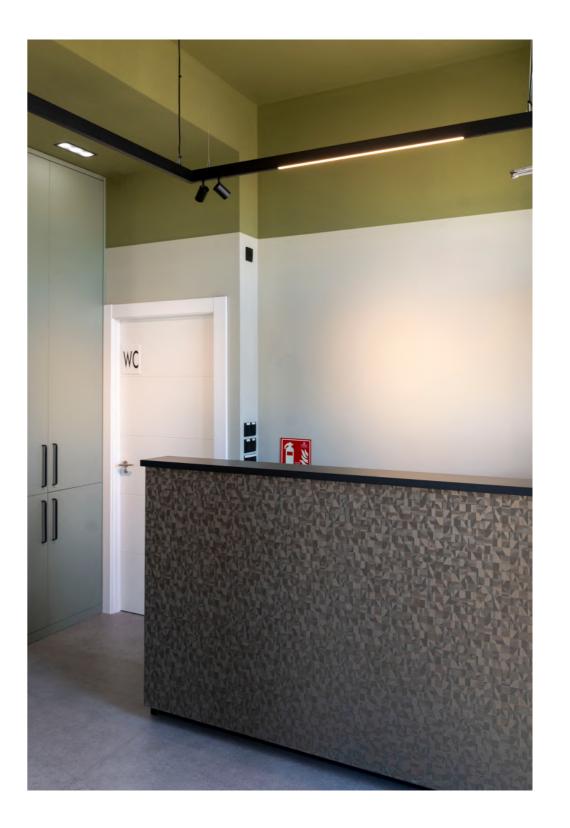



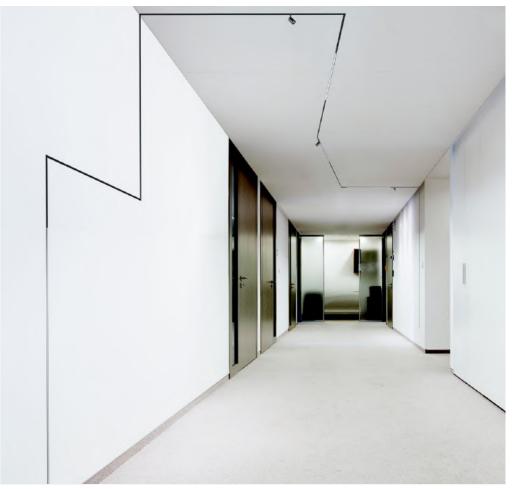

# SYSTEM 48 **SUMMARY SHEET**

### **Tracks**



TRACK 48



TRACK 48 Trimless



TRACK 48 Evo



TRACK 48 RT



TRACK 48 TRACK 48 Twin Tube

### **Controls**

- On/Off control
- DALI
- CASAMBI

### **Versions**







SUSPENSION

CEILING

### **Finishes**






WHITE

**BLACK** 

### **Related luminaires**

























R2 48





SPEEDY

# 0

SPOT 48

Mini

**JAM 48** 





**SPOT 48** 

Small

**JAM 48** 





PINKO 48

**ZIK 48** 

Medium





WILLY 48

GO! 48

REVO

Compact






























# SYSTEM 48 Micro **SUMMARY SHEET**

### **Tracks**





TRACK 48 Micro

48 Micro CURVE

### **Versions**



CEILING

### **Finishes**





**BLACK** 

### **Related luminaires**









DOTS

SPOT 48 REVO Mini

SPOT 48 REVO Small









LUMILINE

GO! 48




**Controls** 

• DALI • CASAMBI



# TDOOR



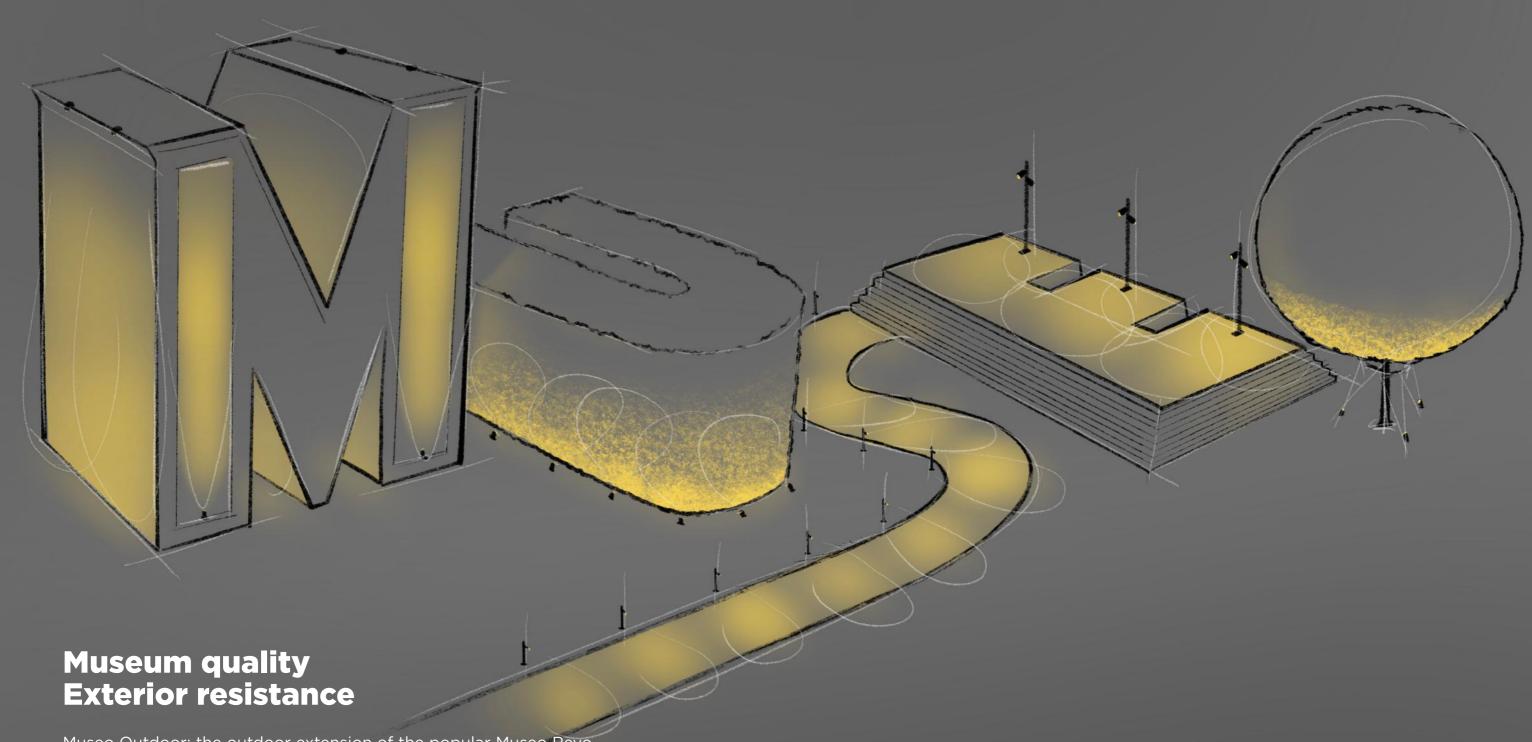

Museo Outdoor: the outdoor extension of the popular Museo Revo

Designed for the lighting of facades, monuments, parks and gardens. Museo Outdoor offers superior light quality, nine beam options and an IP67 protection rating.

Ideal for architects and designers who want a highly professional tool, available in dozens of optics and installation types.




Museo Outdoor offers five sizes, from a discreet 30mm diameter 850 cd to a powerful 100mm diameter 38500 cd.

These extremely versatile fixtures offer everything you need, from the accuracy of precision projections to general and diffused lighting.

Architects and landscape designers find the possibility of obtaining effective, glare-free lighting with compact and camouflaged luminaires perfectly integrated into the day and night environment.






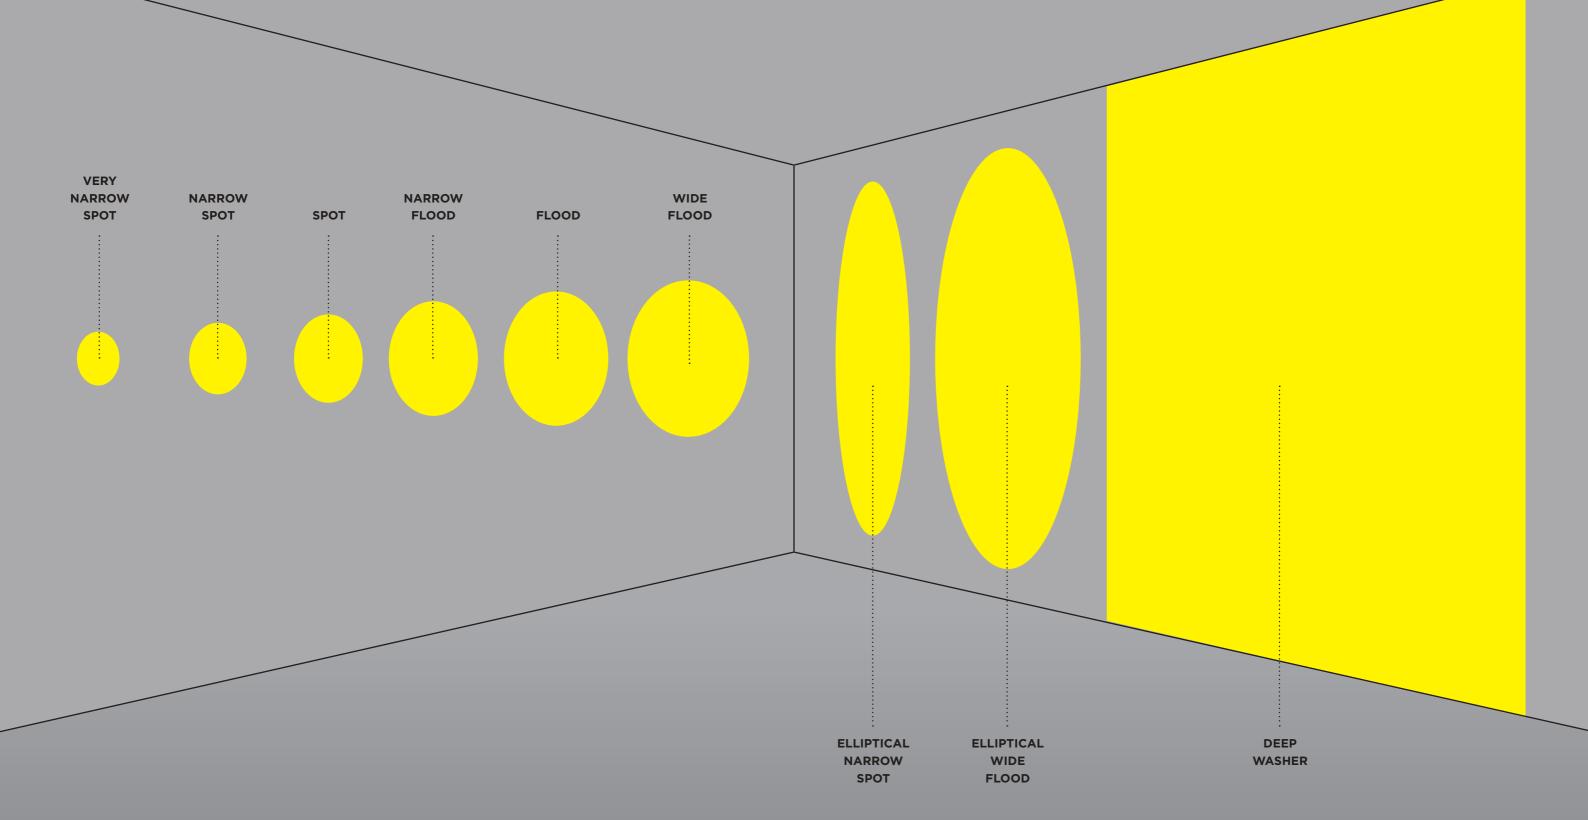


# **Optical versatility**


The nine light beam distributions of Museo Outdoor, ranging from a precise 7-degree spot to a wide 60-degree flood, two ellipticals, an asymmetric and efficient wall washer, allows designers to face down any lighting challenge. Whether it's highlighting architectural details, uniformly illuminating walls or identifying paths, these versatile optics guarantee perfect solutions for every project.


Enjoy the peace of mind that comes from unparalleled flexibility and precision in lighting design.

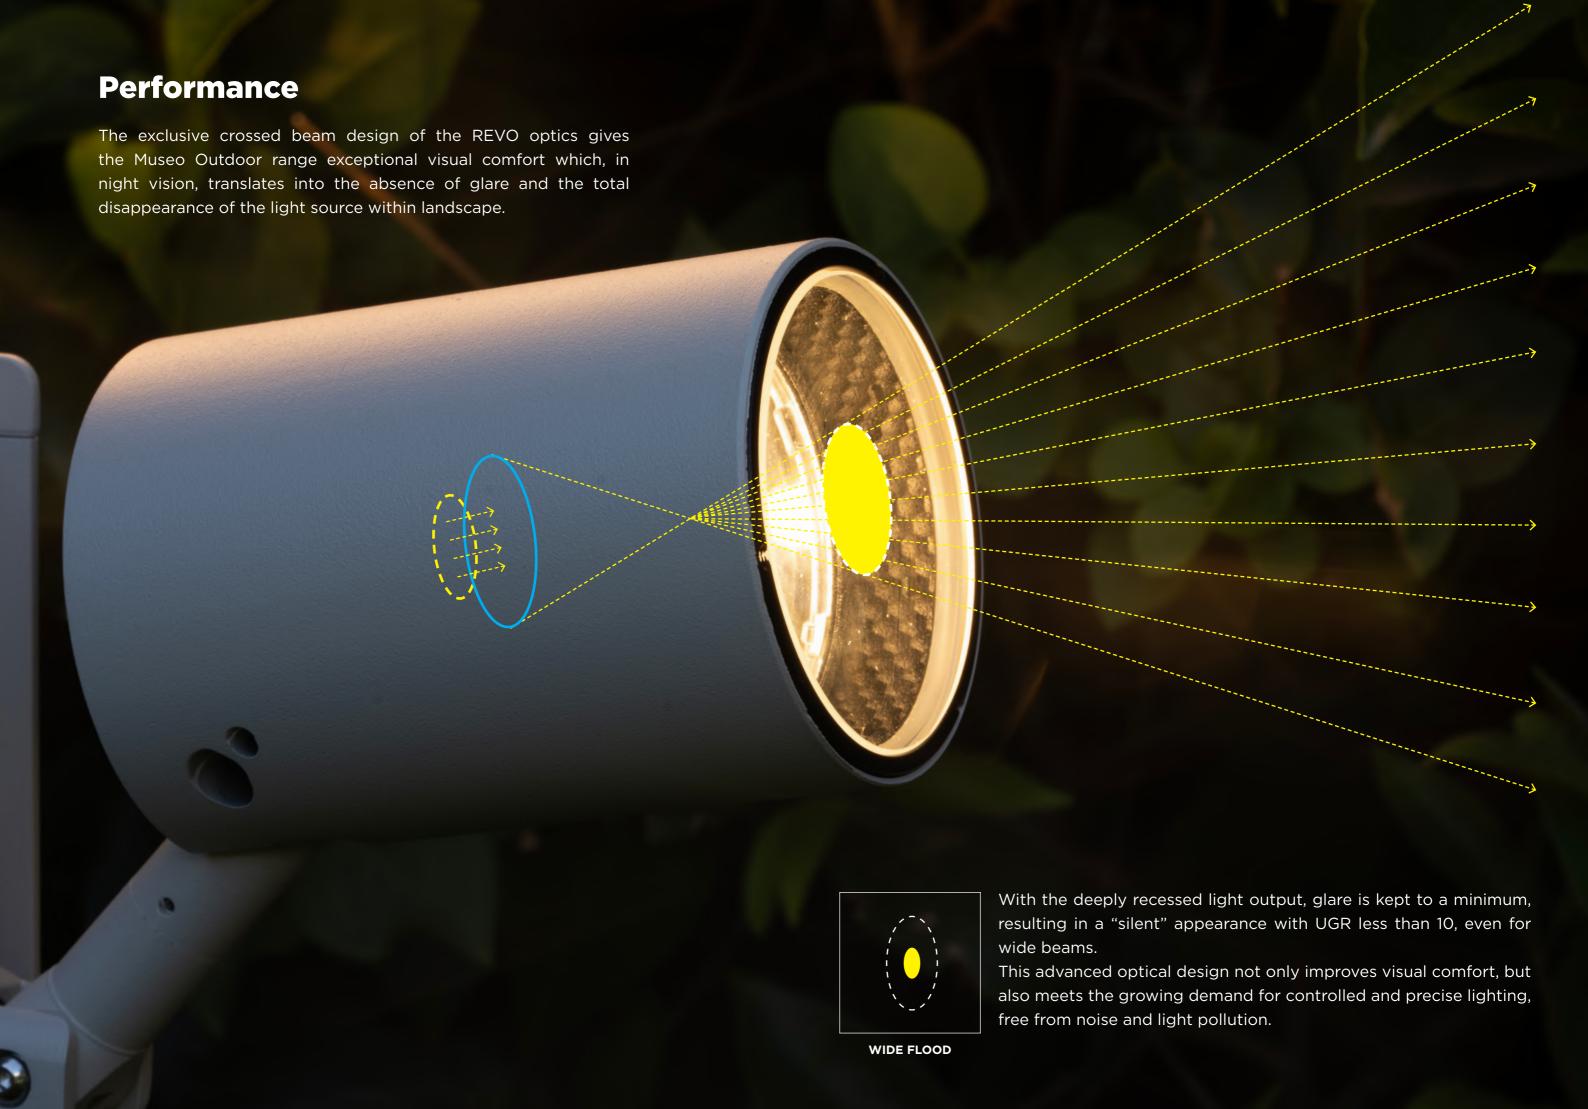




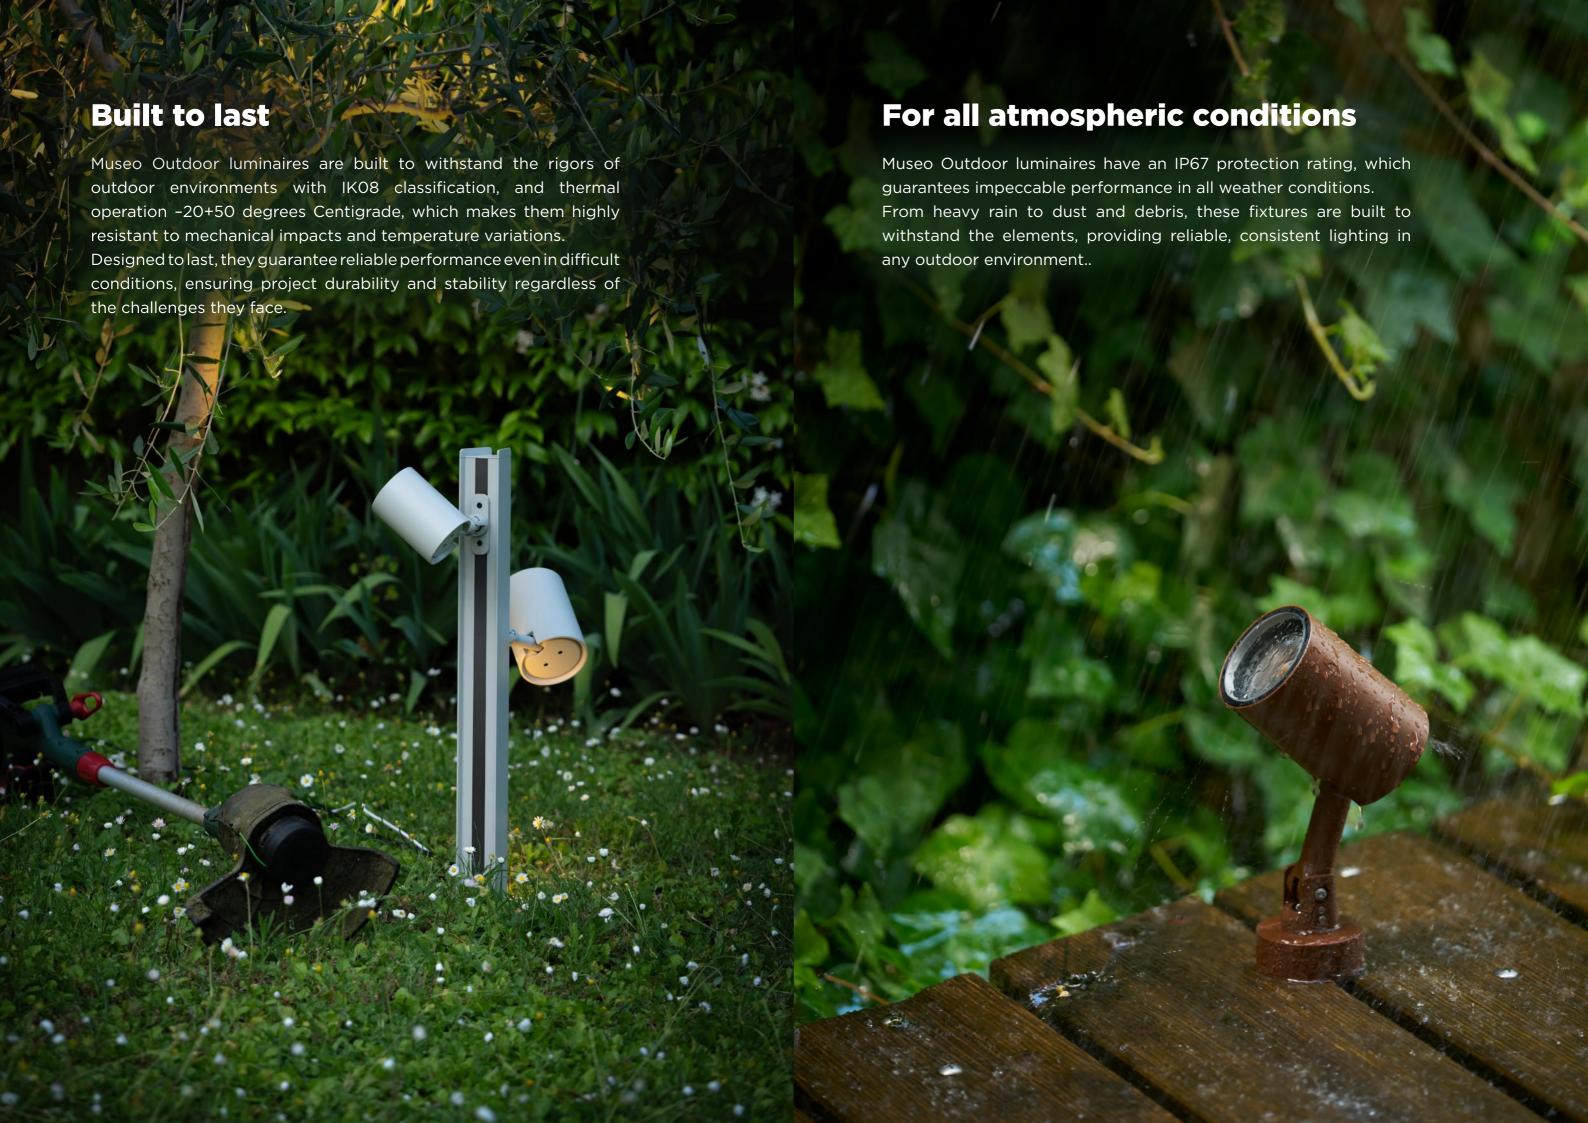

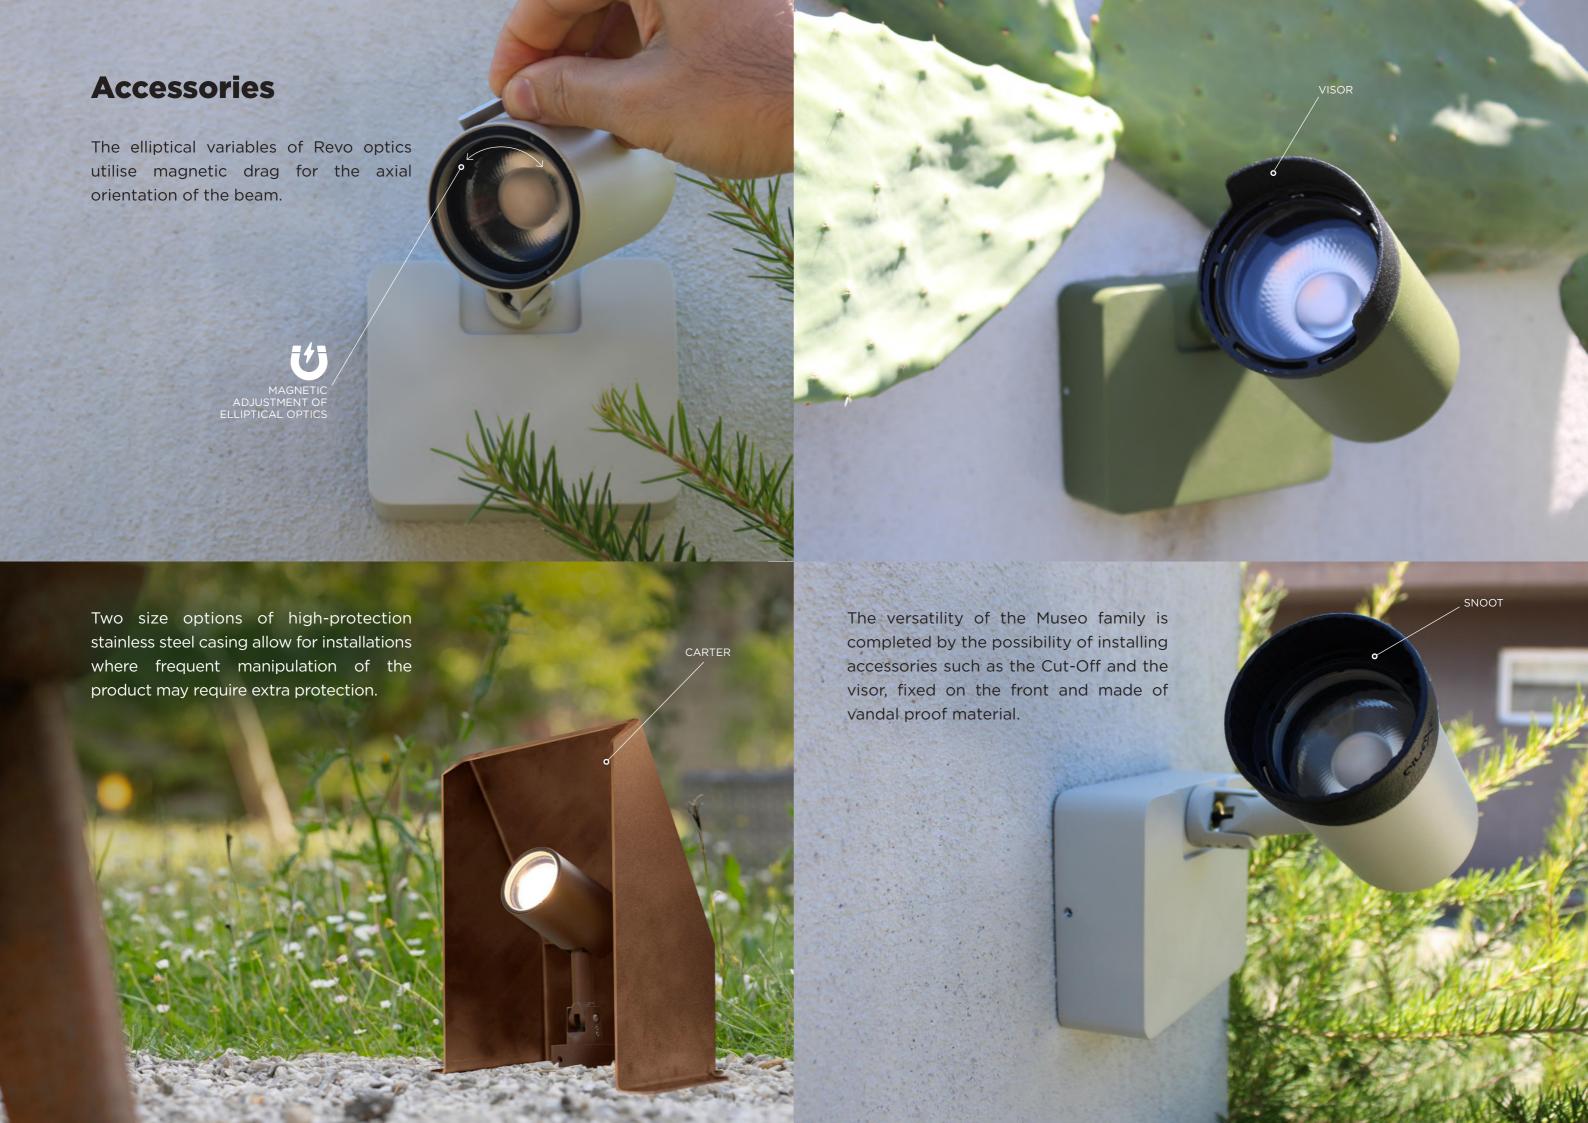


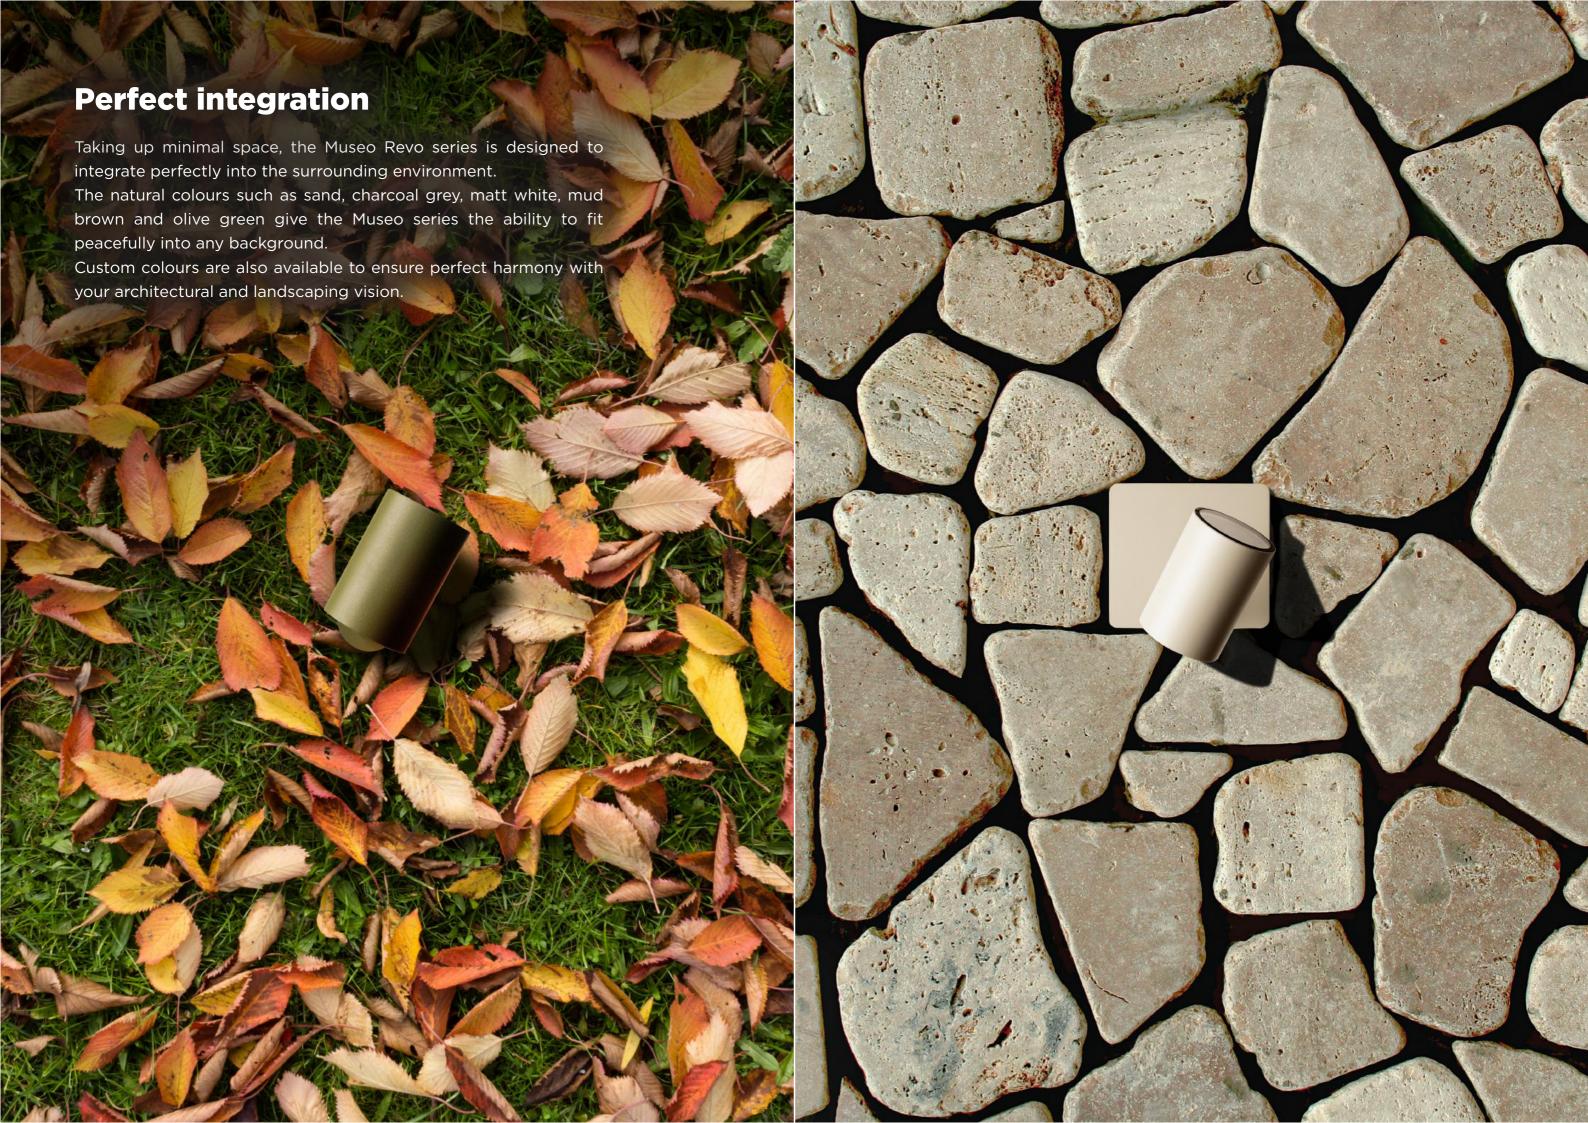



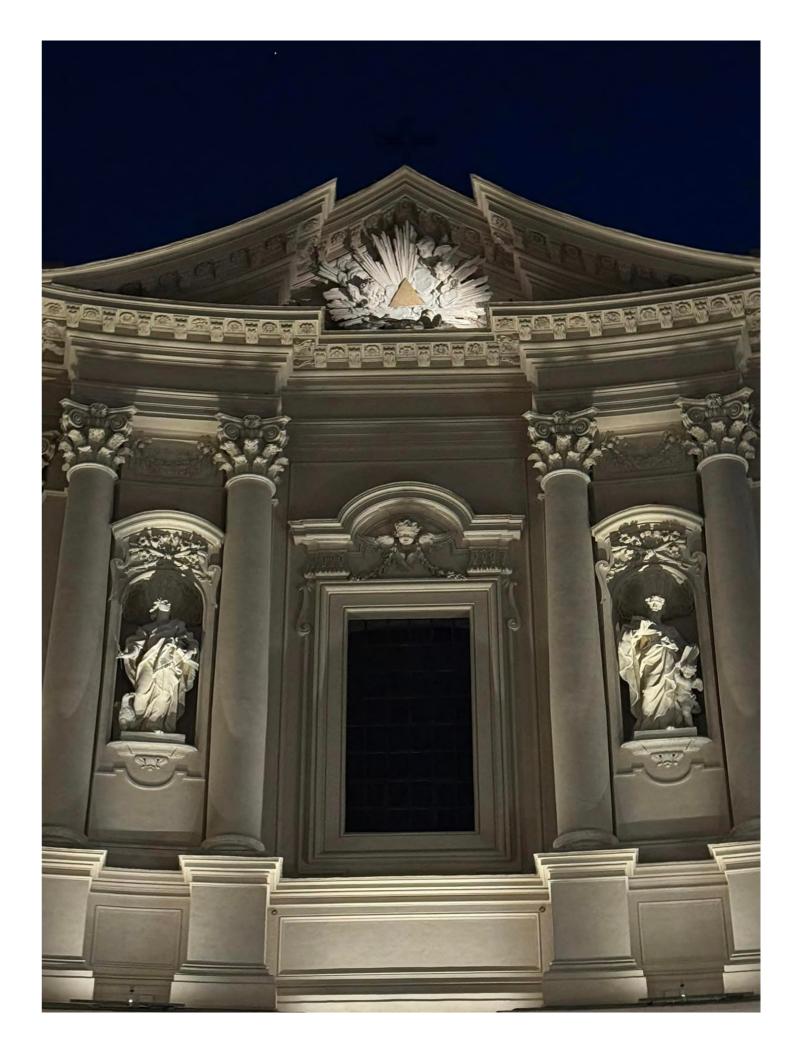

Santissima Trinità dei Pellegrini, Rome. Project Arch. Egidio Ferrara

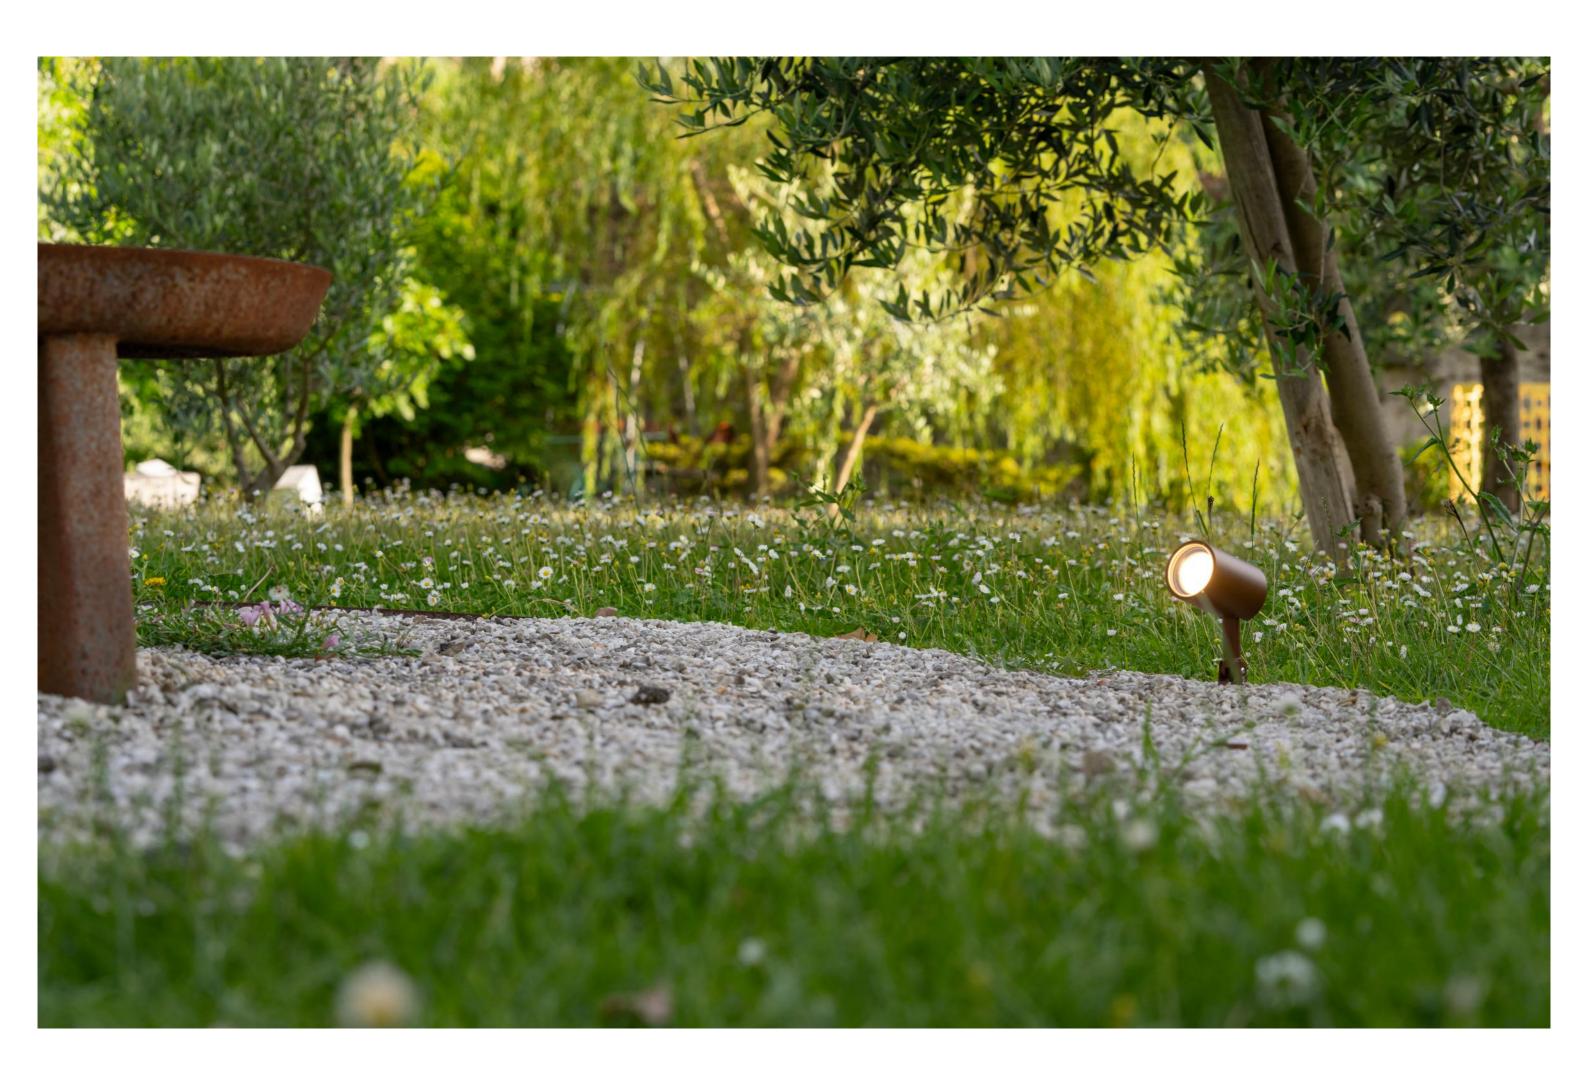











## **SUMMARY SHEET**

#### **Versions**











BASE driver on board

BASETTA TONDA remote driver

PICCHETTO remote driver

**BOLLARD** remote driver

**Power supply** 

500 lm | 700 lm

- AC (230V); CC; CV(48V)
- 230CC
- CV (48V)

Outputs

(Depending on optics and dimensions)

200 lm | 300 lm | 400 lm

1000 lm | 1300 lm | 2000 lm

#### **Controls**

- On/Off control
- DALI

#### **Colour rendering**

- CRI 92
- CRI 98

#### **McAdams**

• 2 STEP

#### **Colour temperature**







#### Certifications

- IP 67
- IK 8

about the product!

Find out more

#### **Dimension**



Ø33mm

VN

**Optics** 



Ø45mm



Ø61mm





COMPACT Ø75mm

Ø96mm

NF





NS



ENS





SP

#### **Finishes**



WHITE



CORTEN

**EFFECT** 



MUD

**BROWN** 







CARBON

**GREY** 



MUSK

**Internal accessories** 



Honeycomb

Diffusing lens



Elliptical

lents





Cut-Off

Connector

#### **External accessories**

SAND





Visor



Carter



COVE LIGHTING







## **Ecosizing**

Nothing is by chance, Metrix is conceived and designed to be the ideal tool for highly sustainable projects.

In addition to its very high yields and small dimensions, we also strip back the raw components required while optimising the sizes available to give the least material waste during production.

This allows us to save energy and material, before, during and after the complete life cycle of the product.



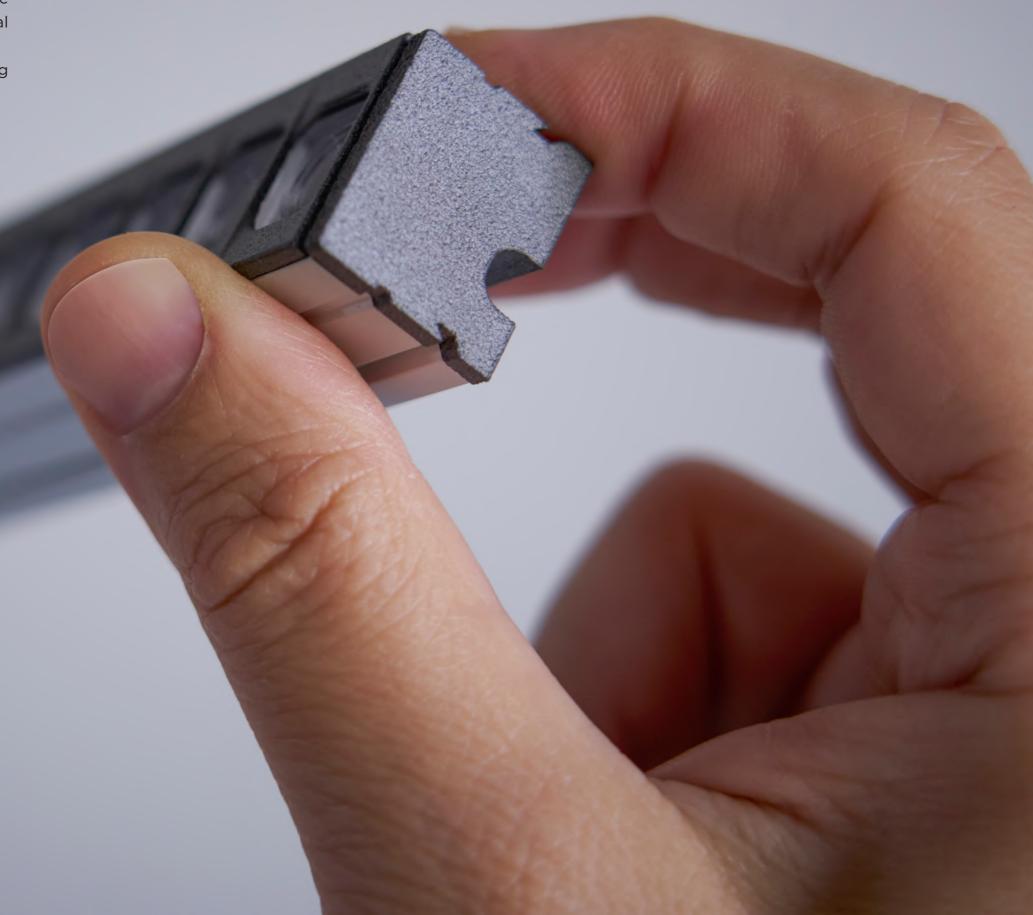



1488 mm



1088 mm



727 mm




366 mm

## Lengths

Current powered linear units in extruded aluminium with remote driver, available in four lengths.



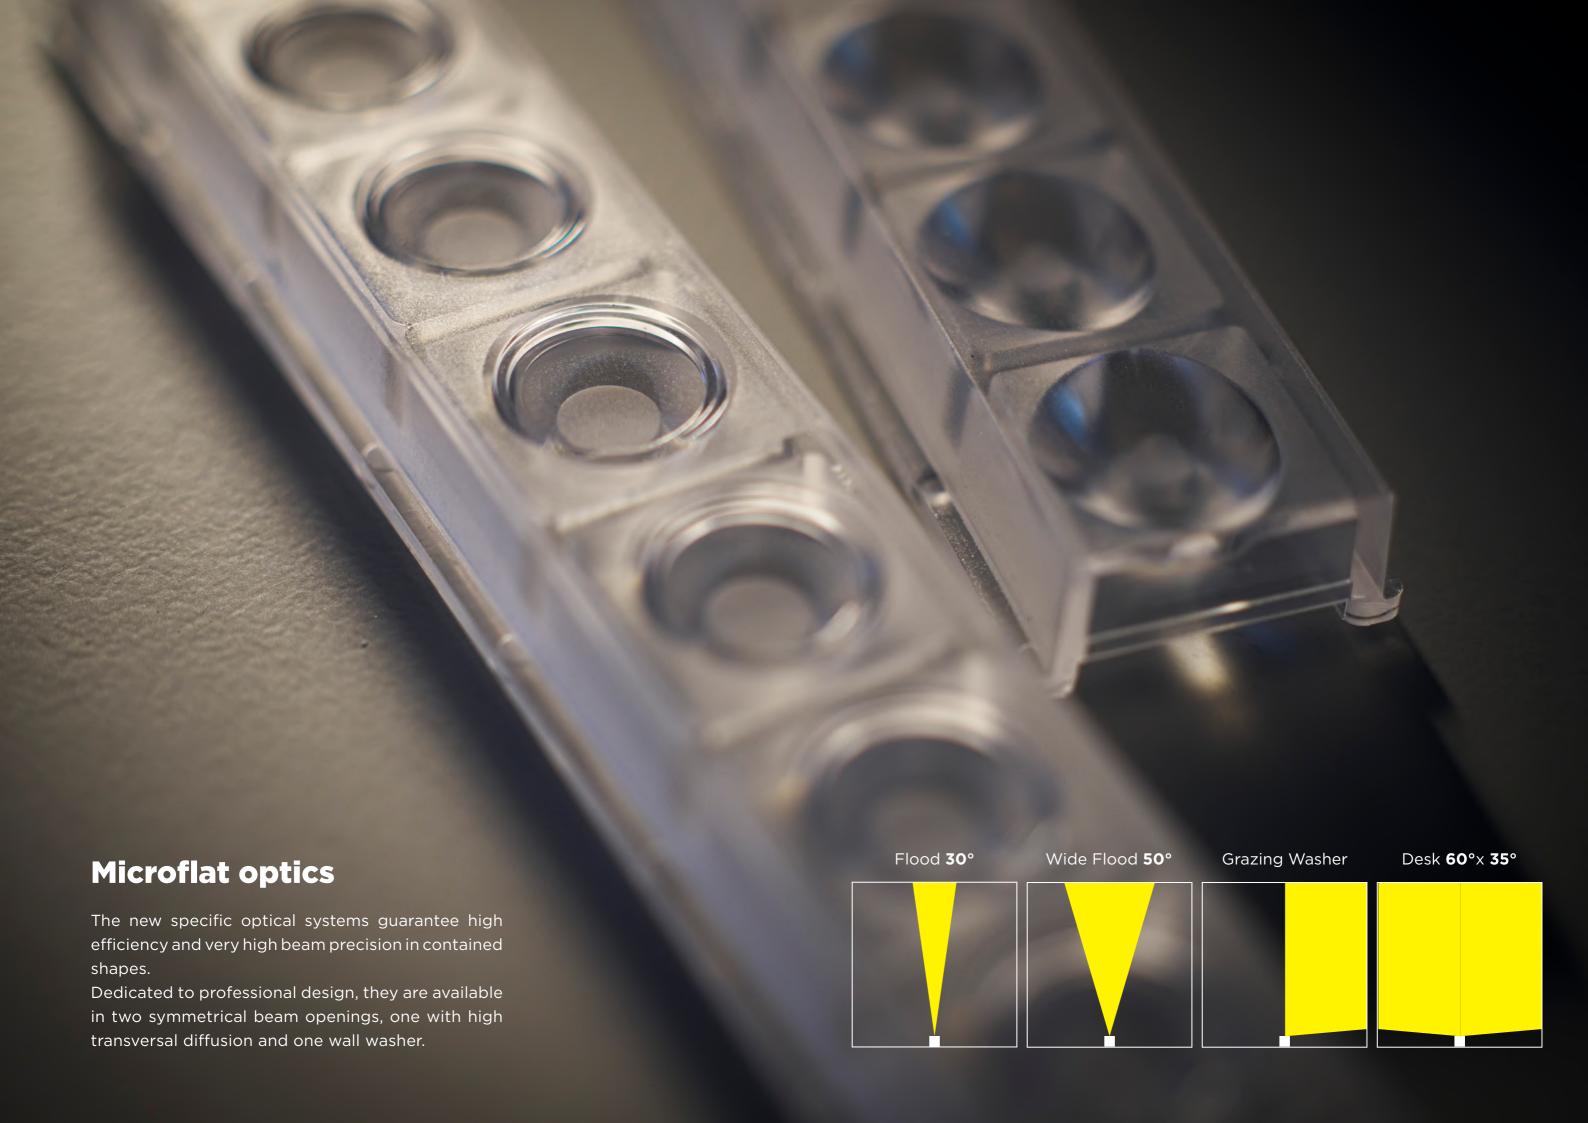

# **Applications** The complete accessories allow installations to ceilings, cornices, or onto a shelf and are fully adjustable.




### **Adjustable joint**

Accessory that can be snapped onto the back of the extrusion. It allows surface fixing and gradual orientation with aiming lock.

Made of PA12, it is flexible and resistant to stress and impacts.


#### **Wall bracket**


Bracket with snap button on the back of the extrusion, for fixed installation on a flat surface, with a 90° orientation.

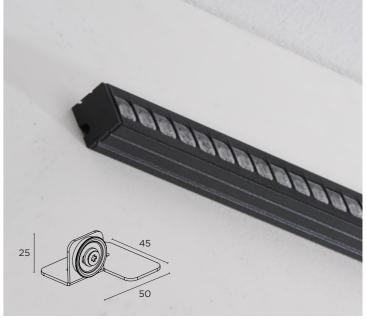



## **Ceiling button**


Snap fastening button for direct installation on a flat surface.

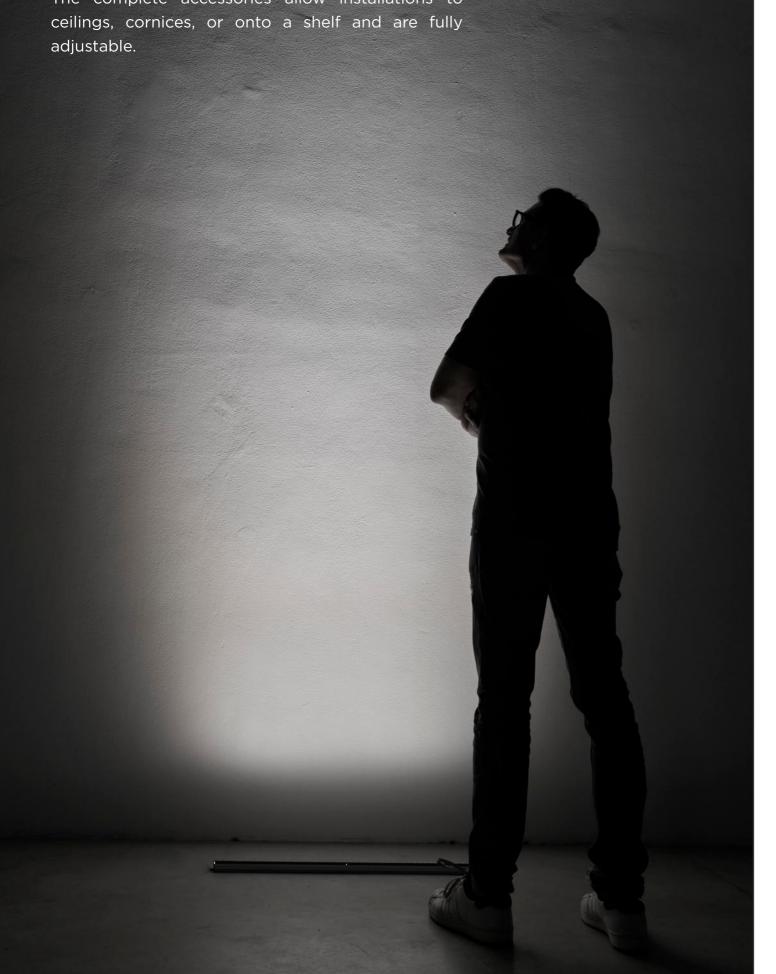


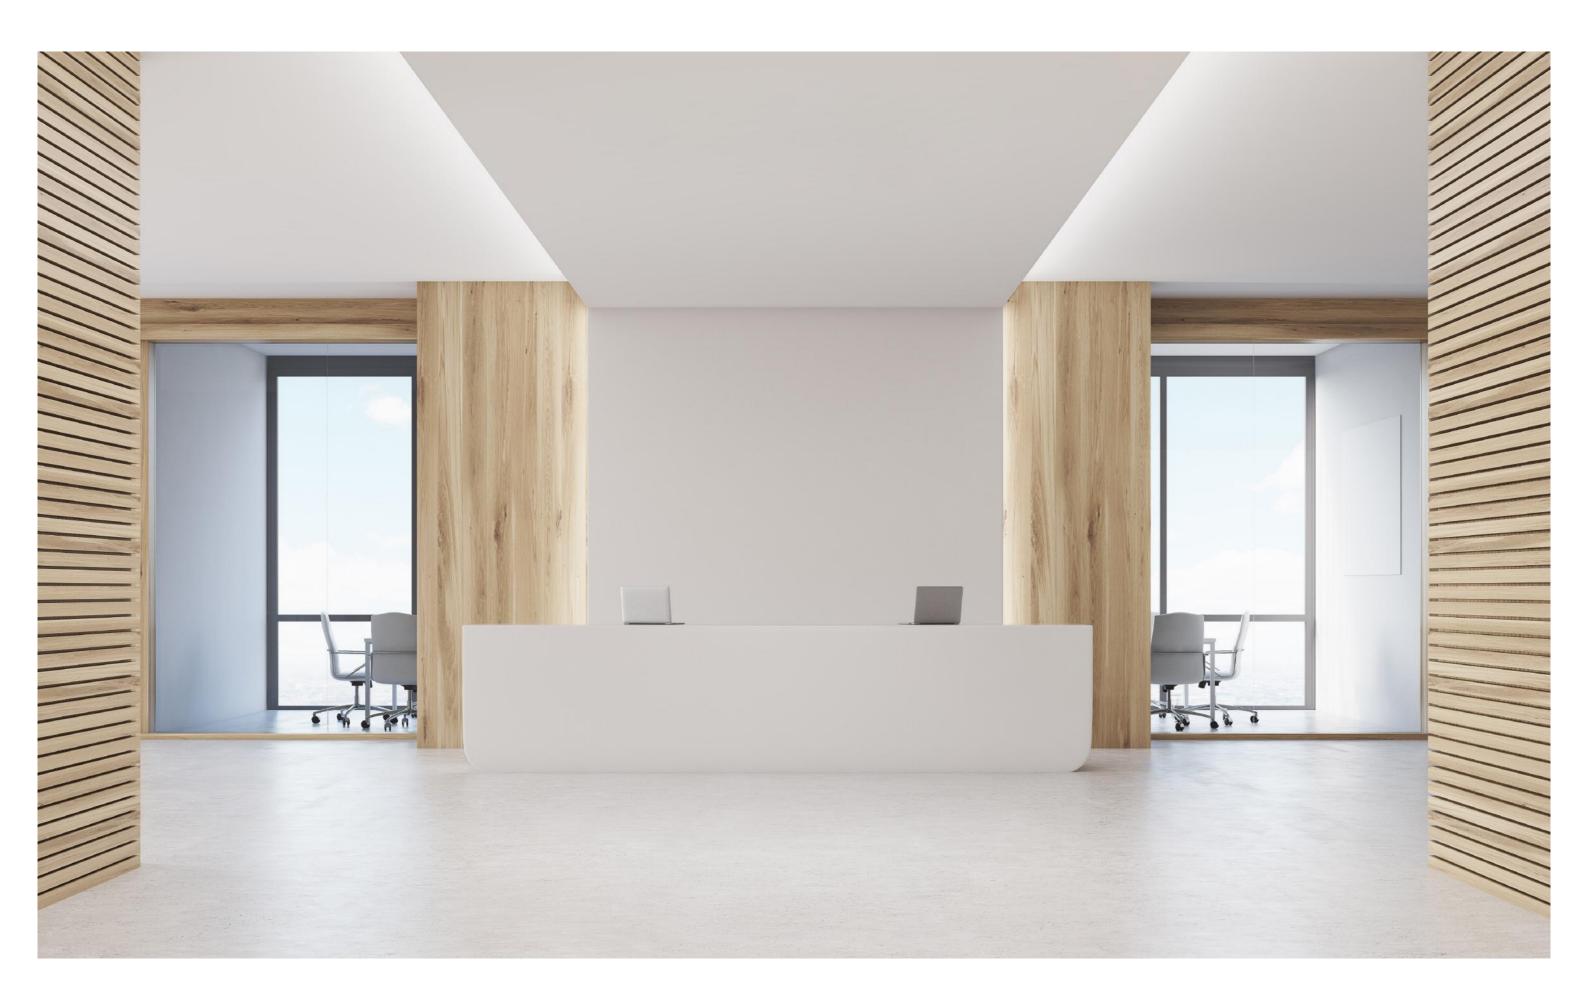

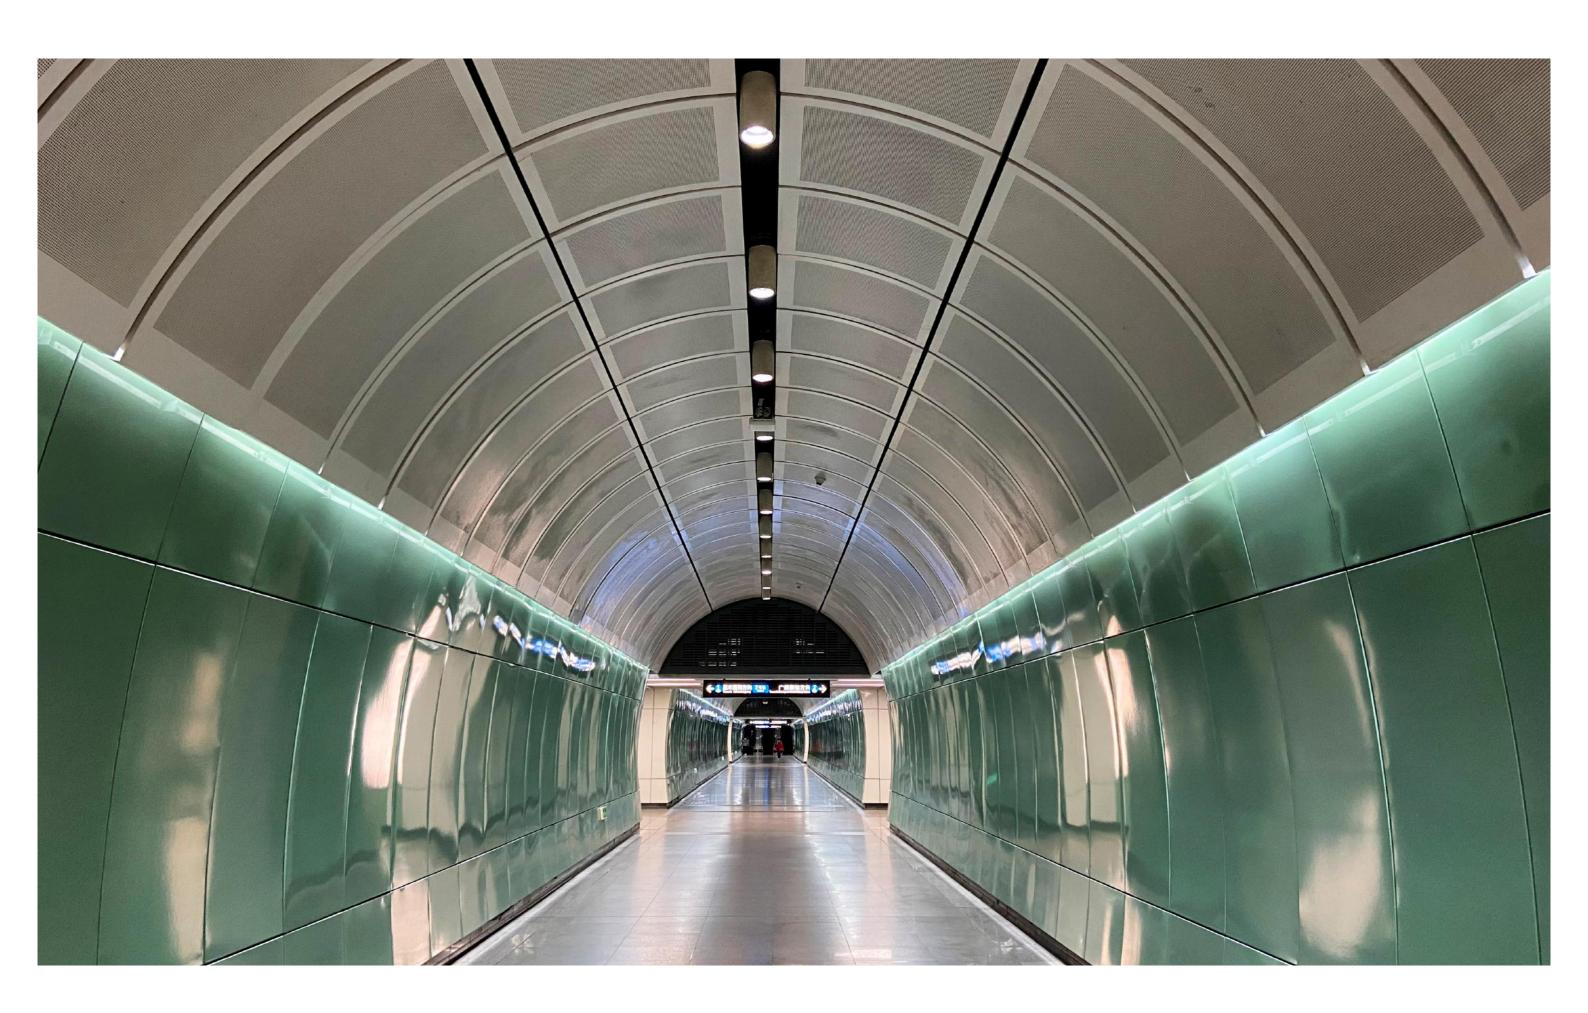

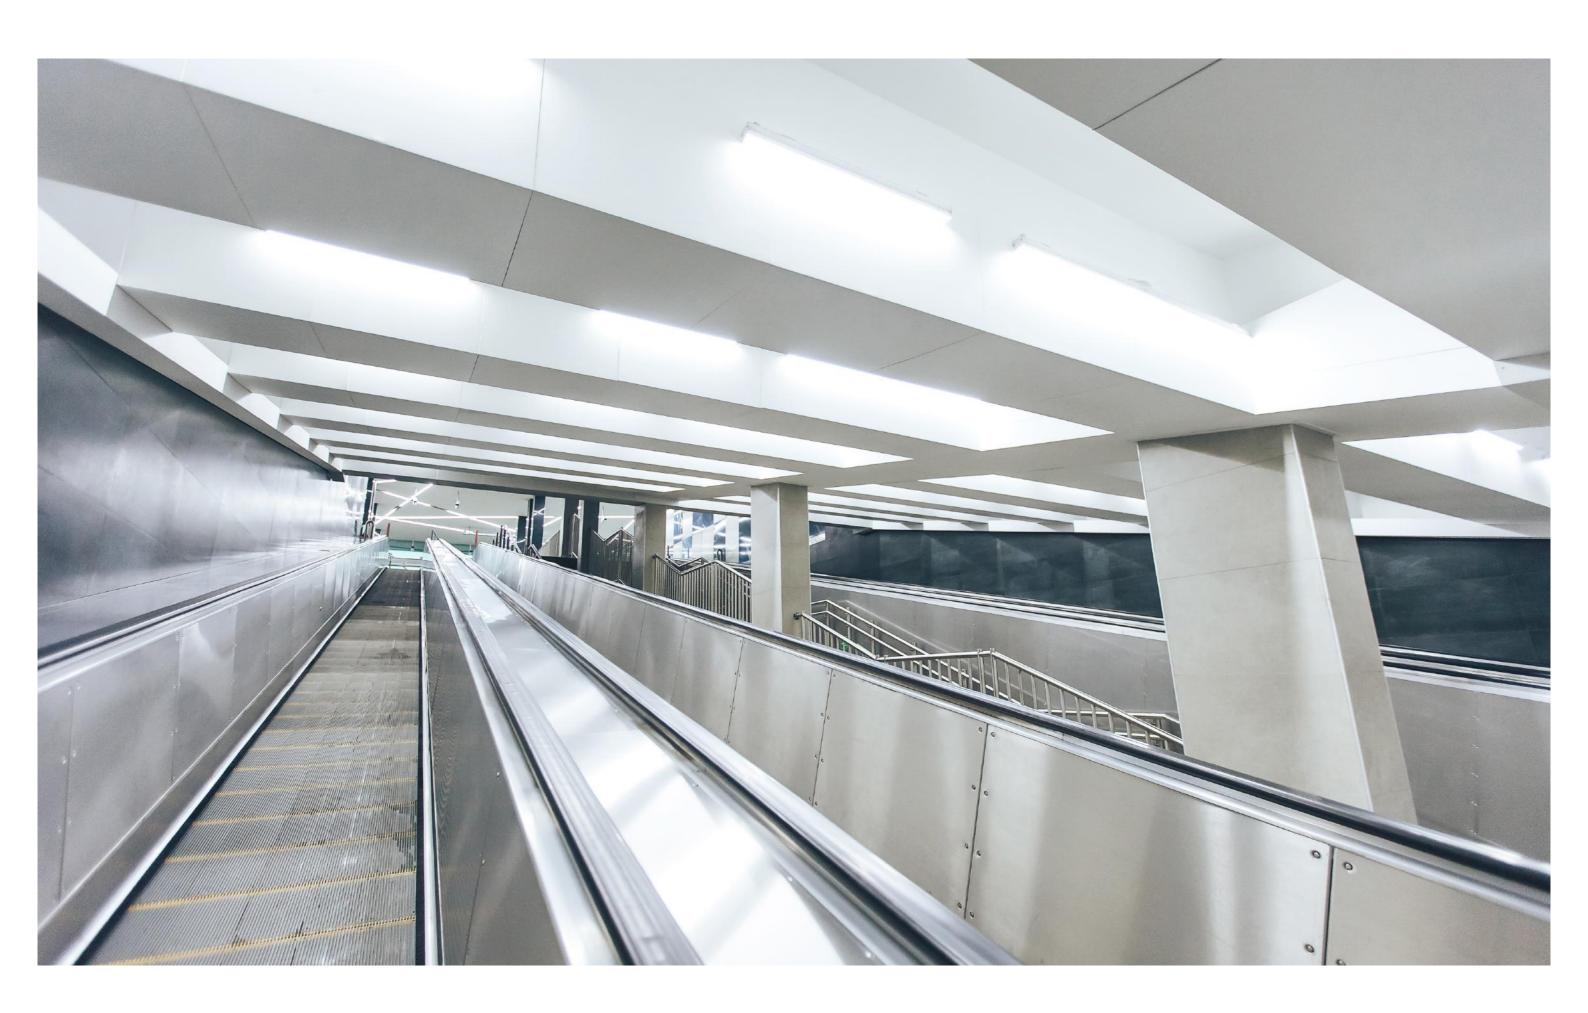


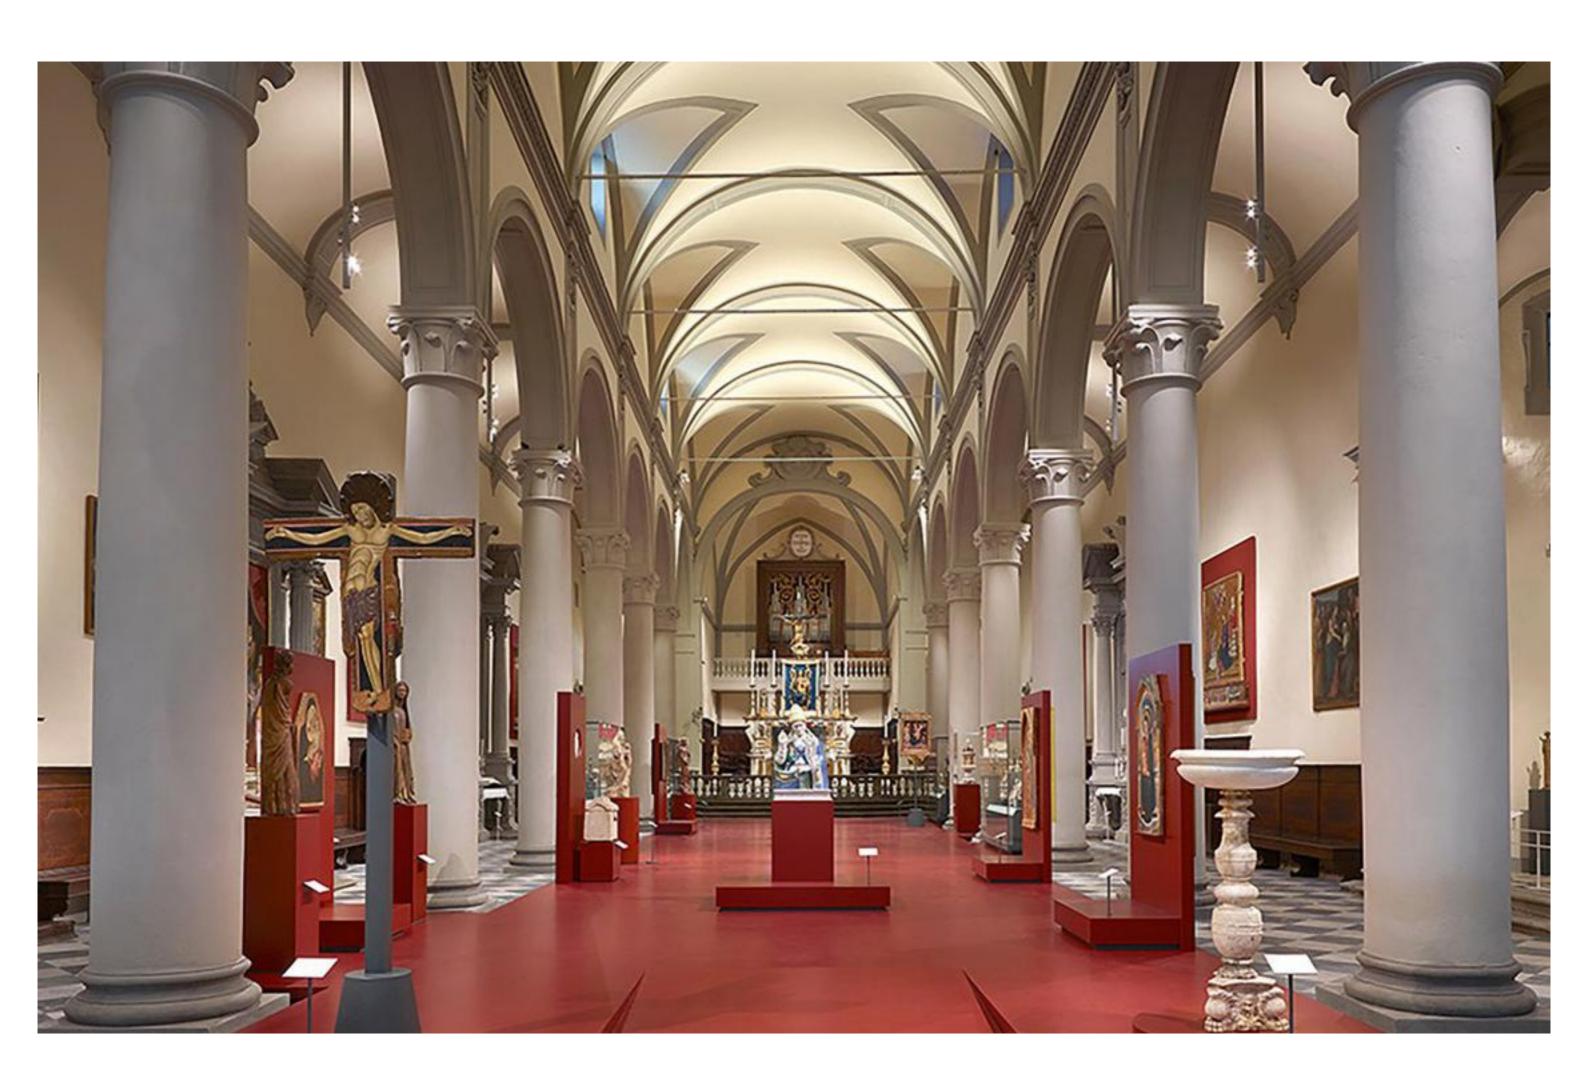

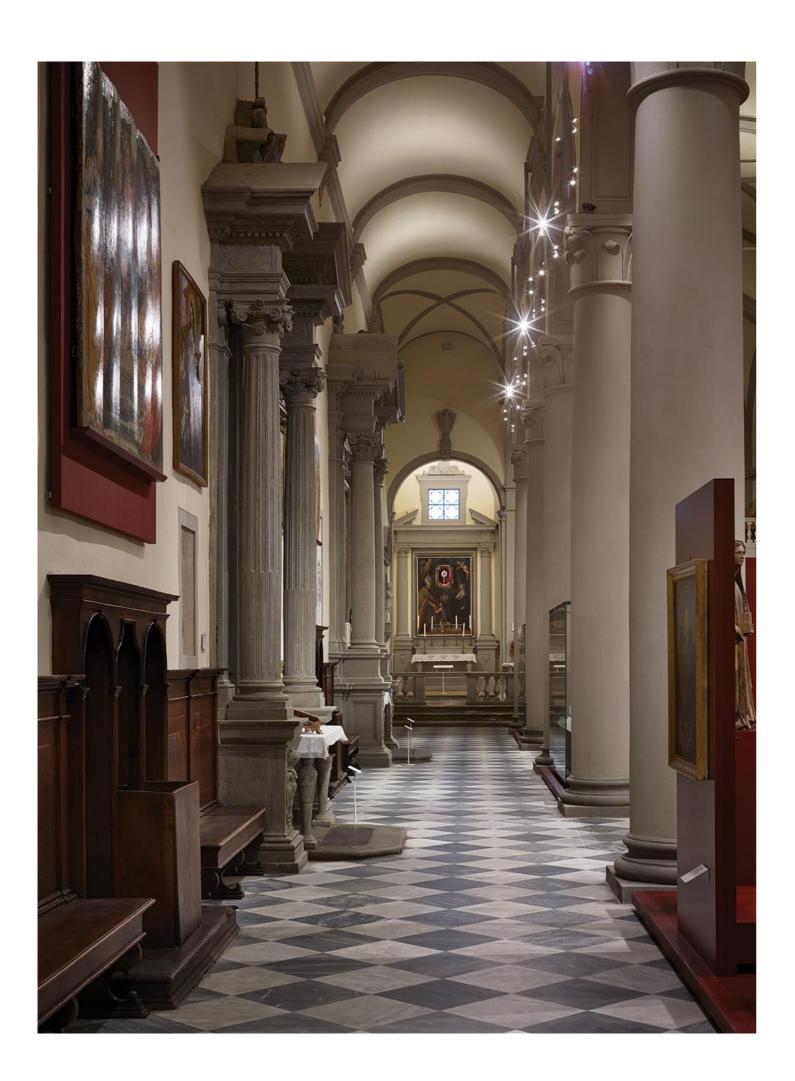

## **SUMMARY SHEET**

#### **Dimension**

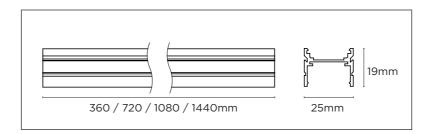

#### Version





Symmetrical Wall Washer

#### **Optics**




Ø22,5


Ceiling

button

#### **Accessories**



**Finishes** 



#### Outputs


(Depending on optics and dimensions)

50mA - 1300Lm/mt 100mA - 2600Lm/mt 150mA - 3800Lm/mt

#### **Controls**

- ON/OFF
- 1-10V
- DALI
- PUSH
- CASAMBI
- T-PHASE

#### **Colour temperature**



#### **McAdams**

• 3 STEP


#### **Colour rendering**

- CRI 92
- CRI 98







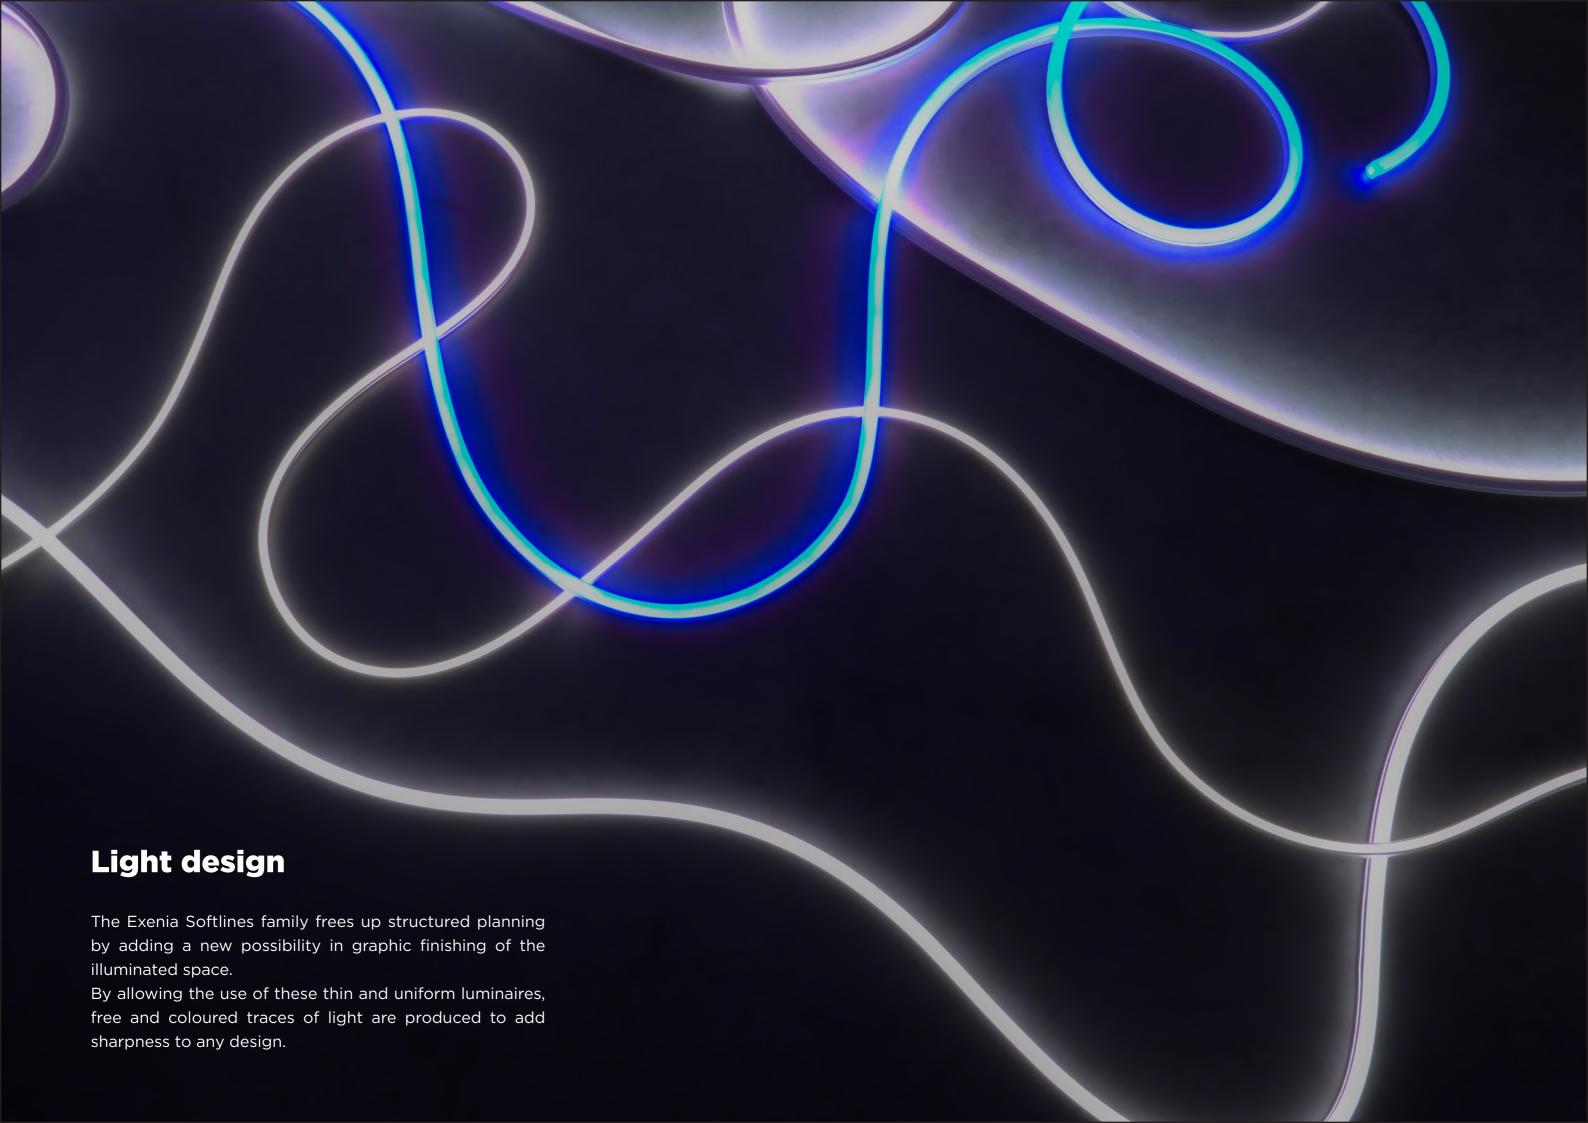





## **SLALOM left-right**

To create different designs on the illuminated plane. This 500lm/m Slalom version flexes on the horizontal component and is available in static and dynamic versions of uniform white and in the RGBW version.













IP67

IKO8








# **FILO** A very thin trace to create a multitude of designs on the surface, with a miniature 4mm light mark. This 270lm/m ROW version flexes on the horizontal component and is available in static, uniform white versions. 2700K 3000K 4000K IP65 IK06

## **SEGNOLIBERO**



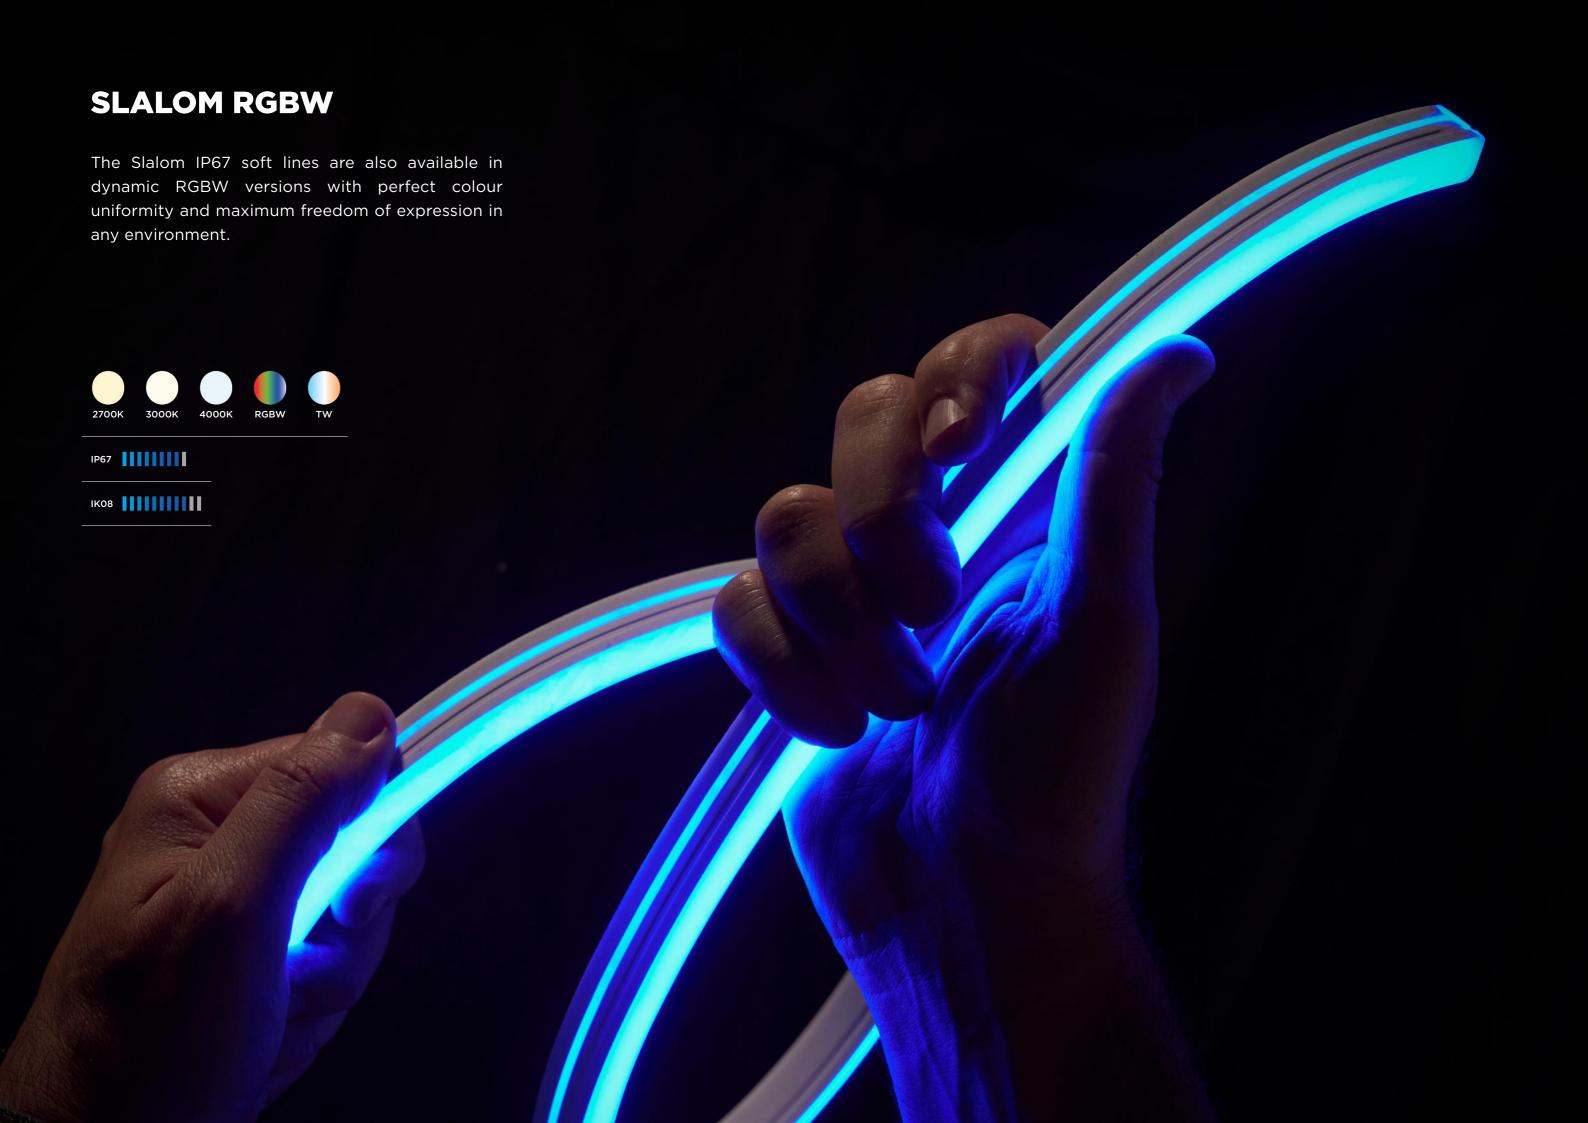


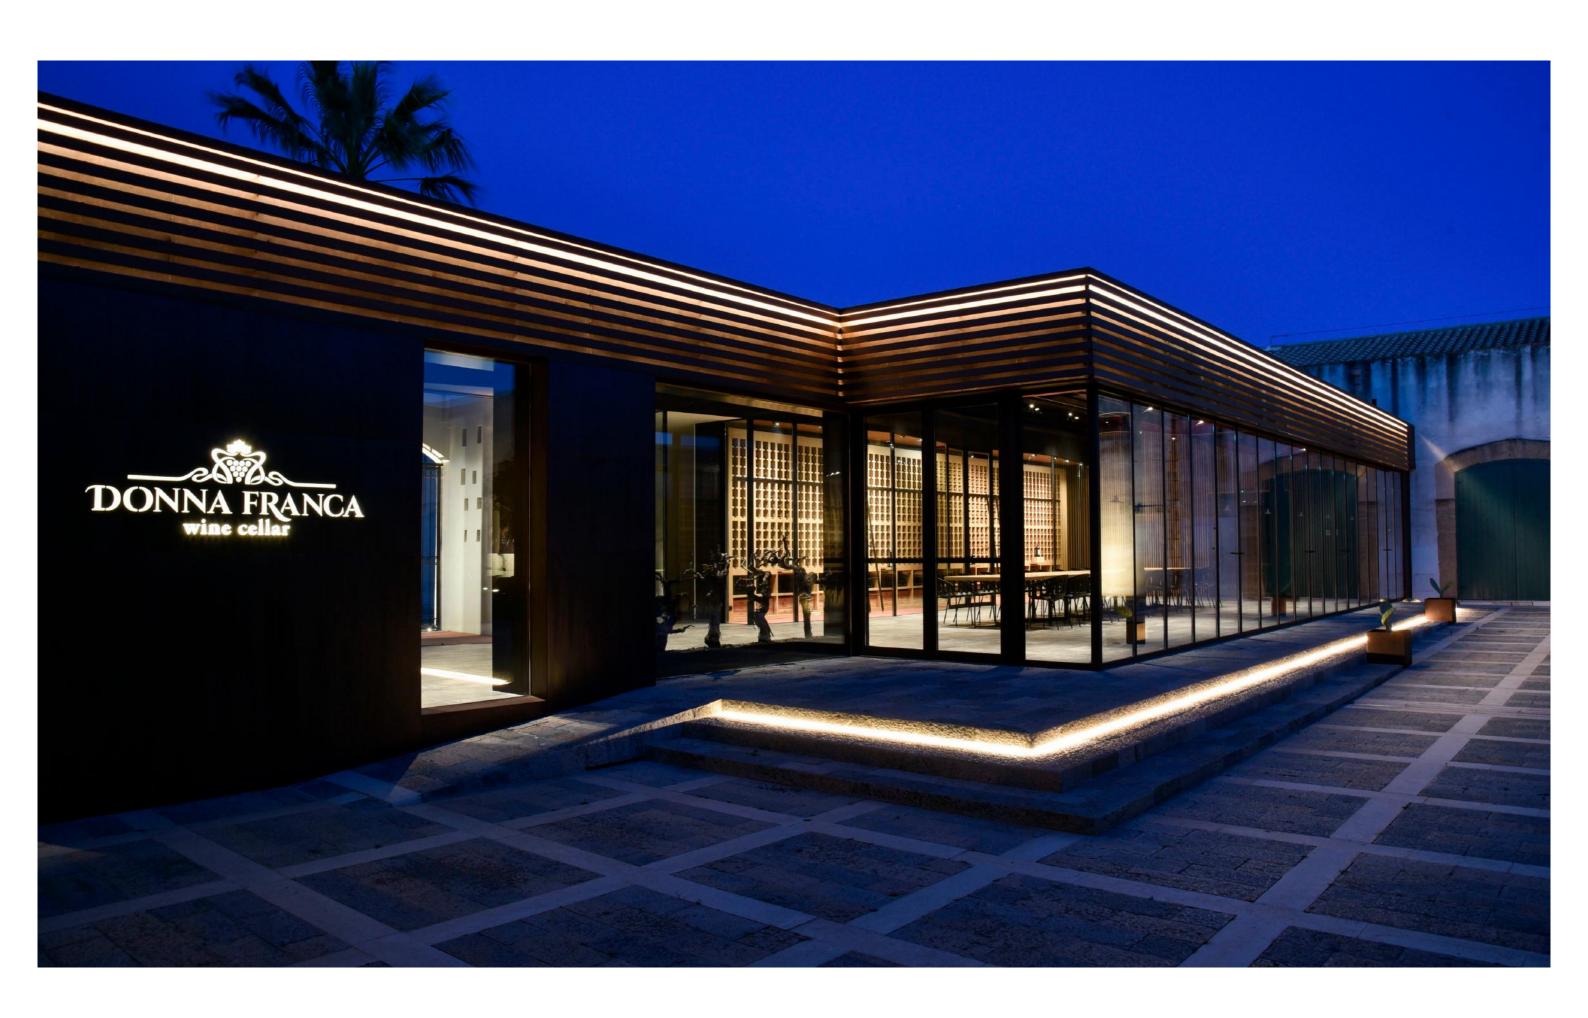


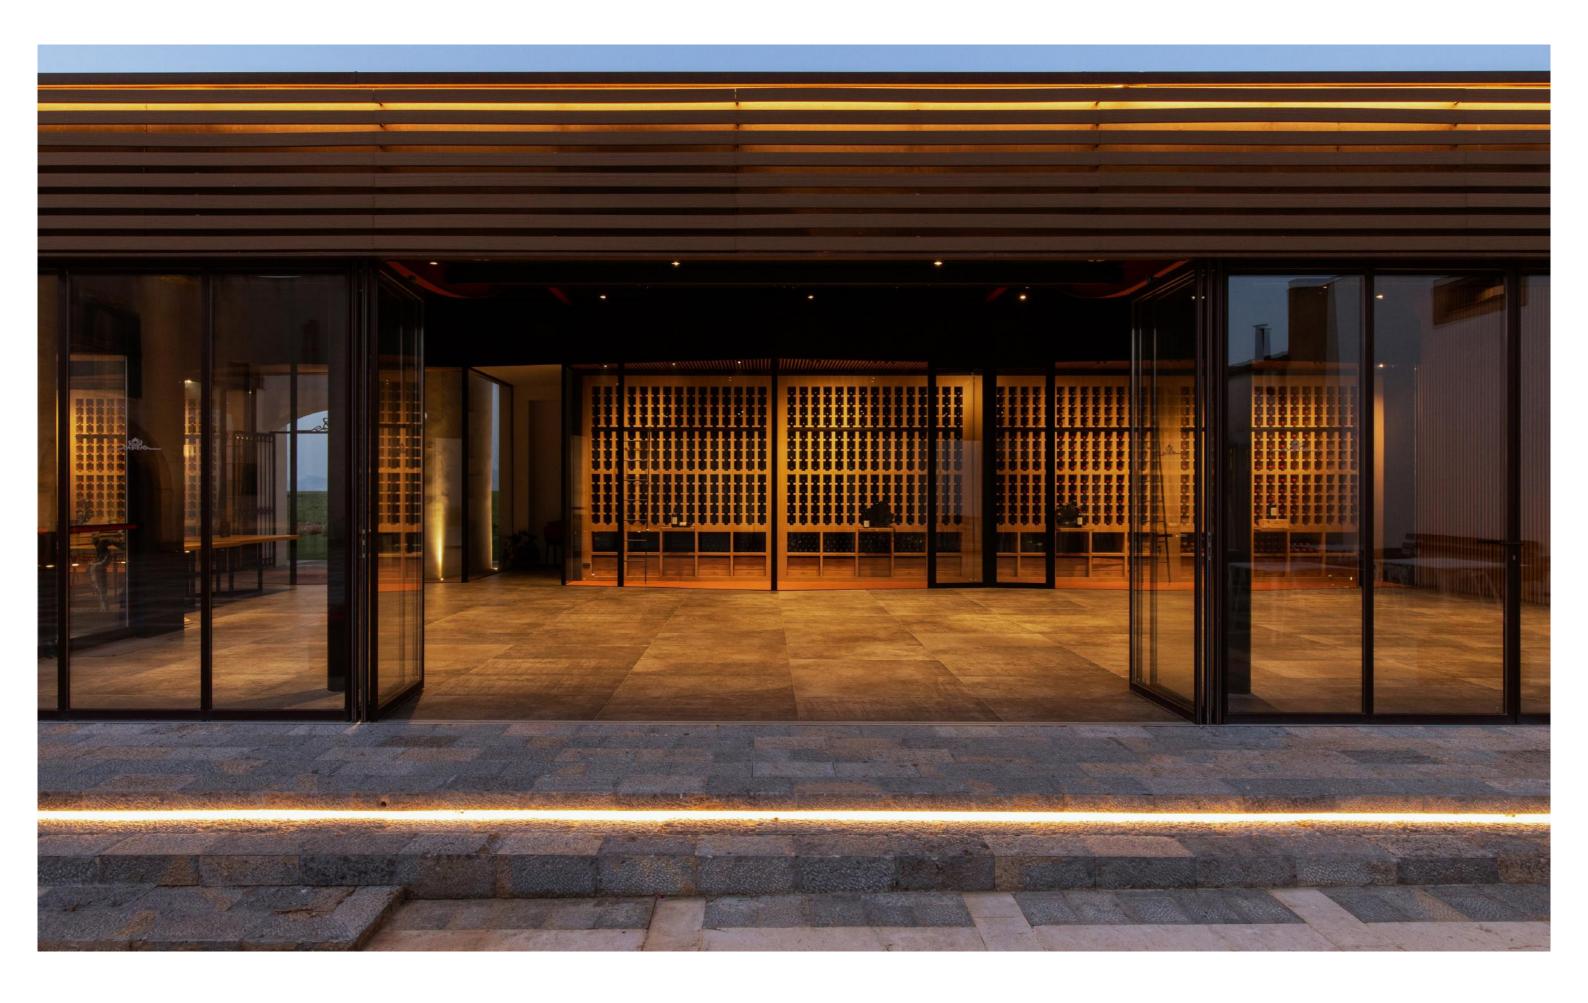





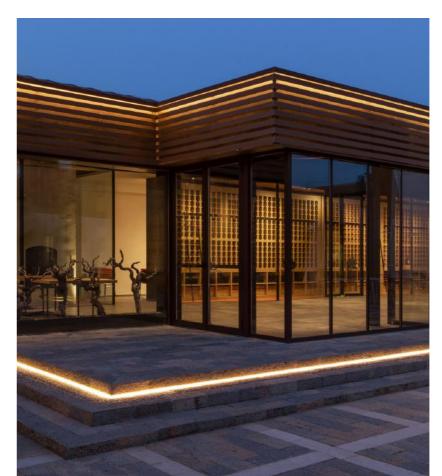


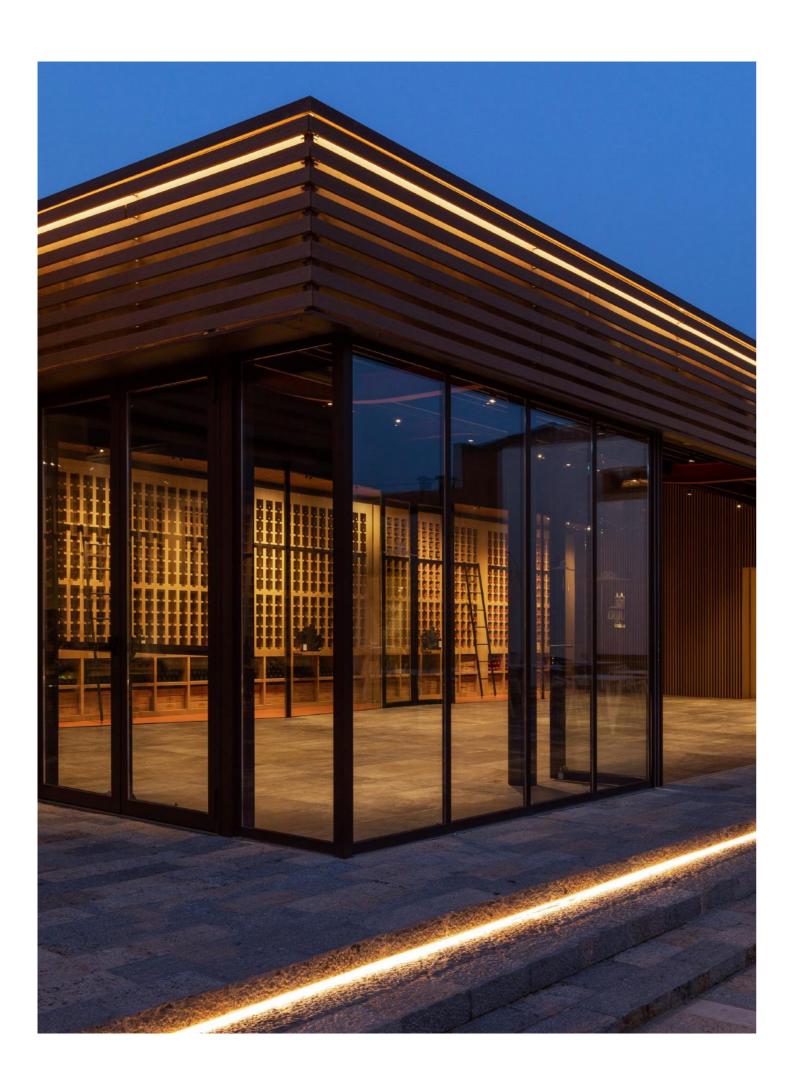


## **SUMMARY SHEET**

#### Version





SLALOM



SLALOM

LEFT-RIGHT













## 2700K 3000K 4000K RGBW

#### Voltage

• 24V

#### Controls

- On/Off control
- Casambi
- DALI
- DMX

#### **McAdams**

• 3 STEP

#### Certifications

- IP 65
- IP 67
- IK 06
- IK 08

#### Lengths

- 2,5m
- 5m



#### **Accessories**















Aluminium Profile 1m

Profile

Jointed Profile 2x50cm

Connettors

Clip